

SURROUNDING ROCK STABILITY
CALCULATION OF ADIT NO.3
[UPPER TRISHULI-1 HEP (216MW)]

2022. 01. 31

FOR INFORMATION

C	2022.1.25	Dong Z.Z.	Lei Y.G	Han J.B.	FOR APPROVAL
B	2021.9.10	Dong Z.Z.	Lei Y.G.	Han J.B.	RR
A	2021.7.18	Dong Z.Z.	Lei Y.G.	Han J.B.	RR
REV	DATE	PREPARED	CHECKED	APPROVED	STATUS

Project

Upper Trishuli-1 HEP (216MW)

Owner



Owner's Engineer



Contractor

DOOSAN Doosan Heavy Industries & Construction

Document Title

Surrounding Rock Stability Calculation of Adit NO.3

Discipline
Civil & Architecture

Purpose
For Approval

Revision No.
C

Document No.

UT1-C-150-CVL-DC-43002

Number of Pages
50

Surrounding Rock Stability Calculation of Adit No.3

RECORD OF REVISION

<u>Rev.</u>	<u>Date</u>	<u>Page Affected</u>	<u>Description of Revision</u>
A	18-July-2021		First Issue
B	10-Sep-2021		Modified
C	25-Jan-2022		Modified

Surrounding Rock Stability Calculation of Adit No.3

Contents

1 General	1
1.1 Background	1
1.2 Design Objective	5
1.3 Purpose and Contents	5
2 Theoretical Background of Calculations	6
2.1 Software.....	6
2.2 Modelling Conditions, Material Law, Constitutive Model.....	6
2.3 Calculation Methodology	7
2.4 Maximum Unsupported Span.....	10
2.5 Ground Characteristic Curve.....	11
2.6 Longitudinal displacement profile (LDP) for tunnel.....	14
3 Properties of Materials	16
3.1 Rock Mass Properties	16
3.2 Shotcrete.....	17
3.3 Rock Dowels.....	17
3.4 Lattice Girder and Reinforcing Bar	18
3.5 Steel support.....	18
4 Initial Proposed Tunnel Supports	18
4.1 Tunnel Support of Excavation Class.....	18
4.2 Safety Factor	19
5 Model Set-up, Boundary and Loading Conditions, Stress Initiation	19
6 Tunnel Modelling and Results	20
6.1 Rock Class I (MAX. Buried Depth 300m).....	20
6.2 Rock Class II (MAX. Buried Depth 300m).....	21
6.3 Rock Class III (MAX. Buried Depth 300m).....	23
6.4 Rock Class IV (MAX. Buried Depth 100m)	25
6.5 Rock Class IV (MAX. Buried Depth 150m)	28
6.6 Rock Class IV (MAX. Buried Depth 200m)	32
6.7 Turning Bay (MAX. Buried Depth 150m)	35
6.8 Junction (MAX. Buried Depth 300m)	38
7 Wedge Analysis	41
7.1 Discontinuity Input Data	41
7.2 Wedge Stability Analysis	45
8 Conclusions and Recommendations.....	48
8.1 Conclusions.....	48
8.2 Recommendations	49

Surrounding Rock Stability Calculation of Adit No.3

1 General**1.1 Background**

Upper Trishuli-1 HEP is constructed to utilize the hydro potential of Trishuli River near Dunche and Haku. The construction site is situated in a rugged mountain between Tibet in China and the Himalaya Mountain, about 70 km away from capital of Nepal, Kathmandu, towards the northwest. The project is a run-of-river development scheme. The headwork site is at about 280m downstream from the confluence of Bhotekoshi and Trishuli rivers. The powerhouse site is 500m upstream from Mailun Dobhan where Haku VDC is placed. The installed capacity of Upper Trishuli-1 HEP is 216 MW. It is a year-round power plant capable of generating about 1,533.4 GWh electricity yearly on average.

The Adit No.3 is located on the left bank of headrace tunnel, and the headrace tunnel chainage at intersection area is H+6562.747m. The cross section of headrace tunnel is horseshoe shape and 4.2m×5.6m size. The elevation of the inlet is EL. 1194.28m, and the elevation of outlet is EL.1212.36m. The length of Adit No.3 is 309.575m and longitudinal slope is 5.86%.

According to the Contractor's interpretation and preliminary geological survey data, along the tunnel axis, there are interbedded mica schist and quartz schist are distributed and they are classified as Type IV,III,II as per Q-method from inlet to outlet, the buried depth from inlet to outlet is about 50m to 300m, averaged 200m approximately. It is speculated that the whole tunnel is mostly dry, individual joints surface is wet. No potential continuous sliding surface is found on the tunnel slope.

The longitudinal profile of Adit No.3 is shown in Figure 1.1. The preliminary excavation cross section and preliminary support pattern are shown in Figure 1.2~1.7.

Surrounding Rock Stability Calculation of Adit No.3

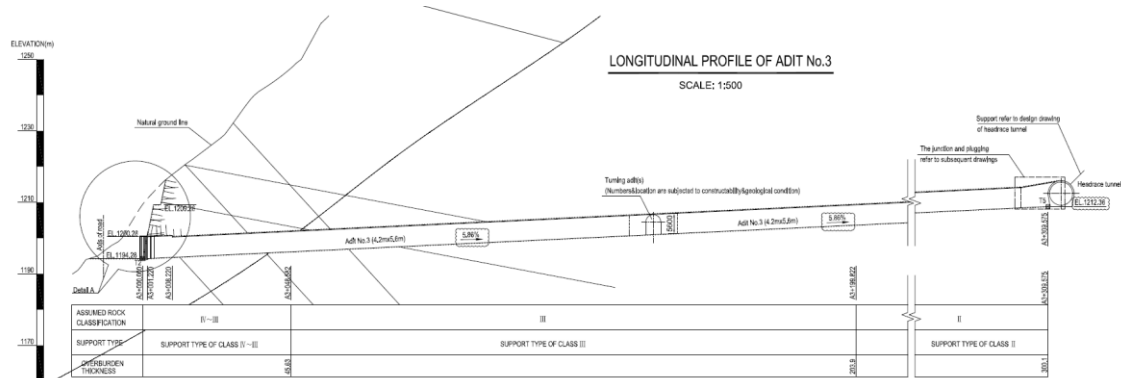


Figure 1.1 Longitudinal Profile Section of Adit No.3

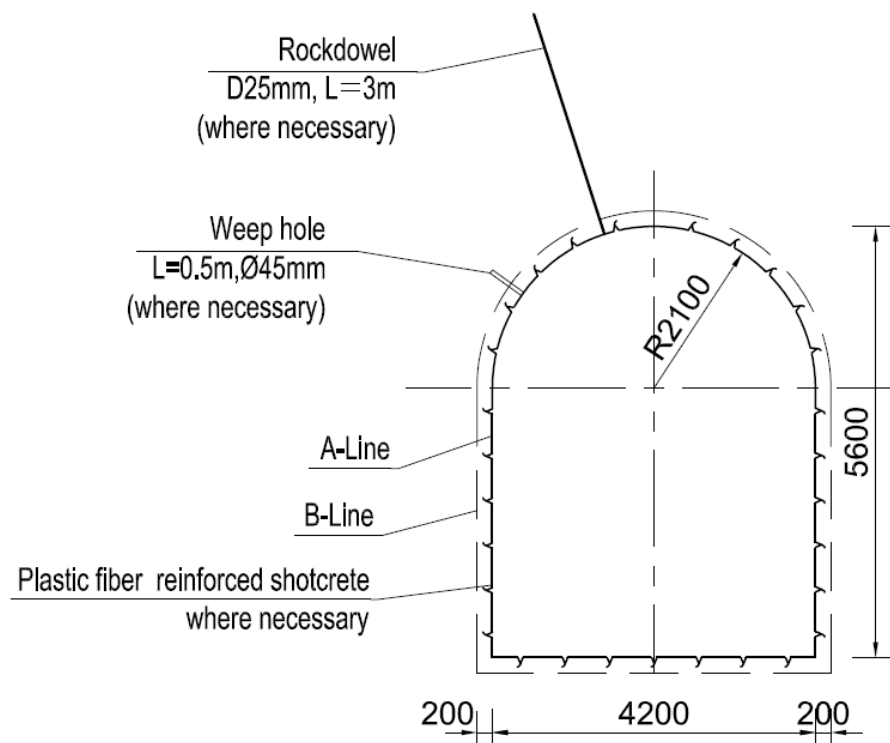


Figure 1.2 Typical section of adit No.3 (rock class I)

Surrounding Rock Stability Calculation of Adit No.3

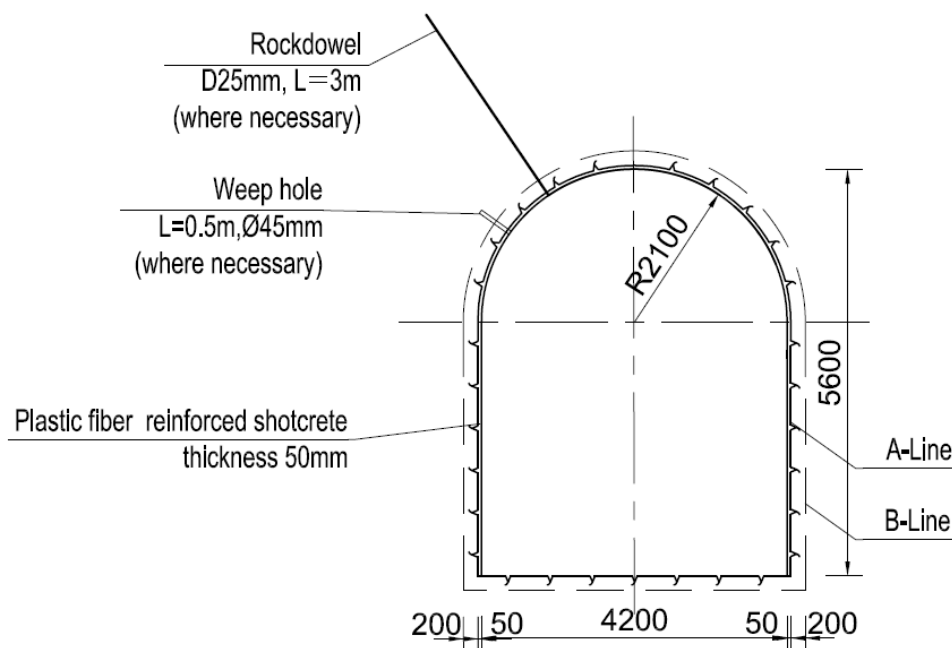


Figure 1.3 Typical section of adit No.3 (rock class II)

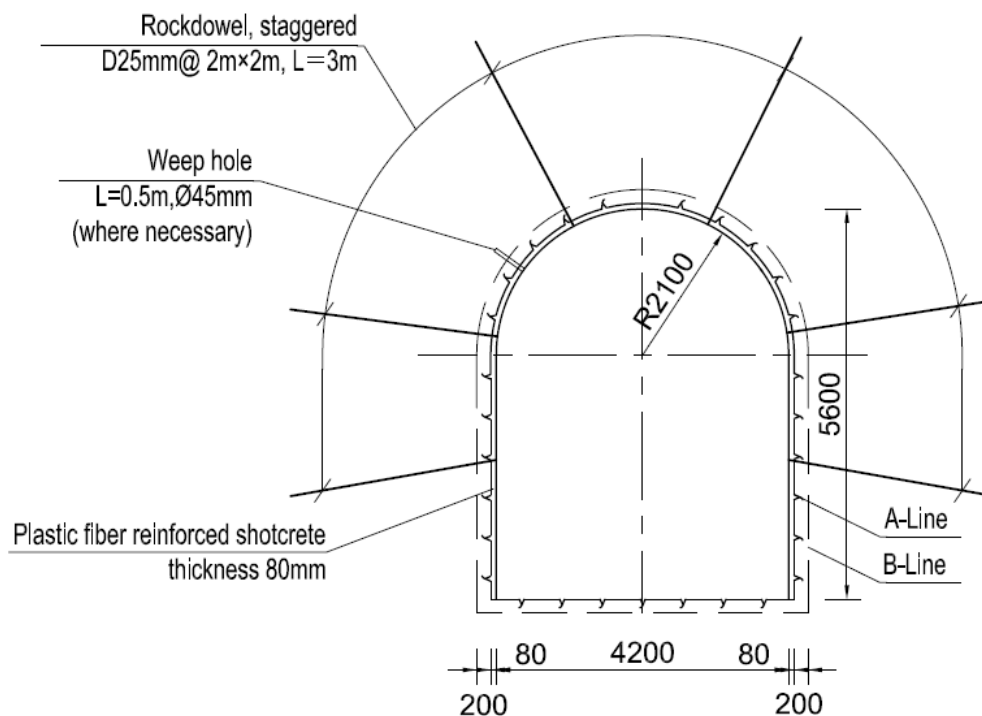


Figure 1.4 Typical section of adit No.3 (rock class III)

Surrounding Rock Stability Calculation of Adit No.3

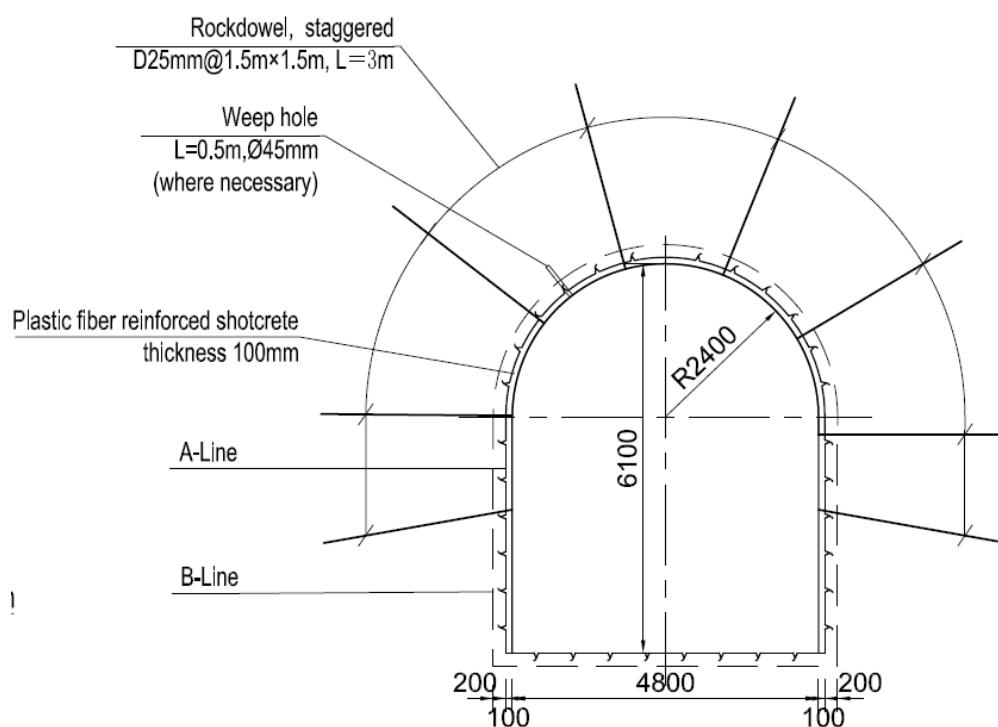


Figure 1.5 Typical section of adit No.3 (rock class IV)

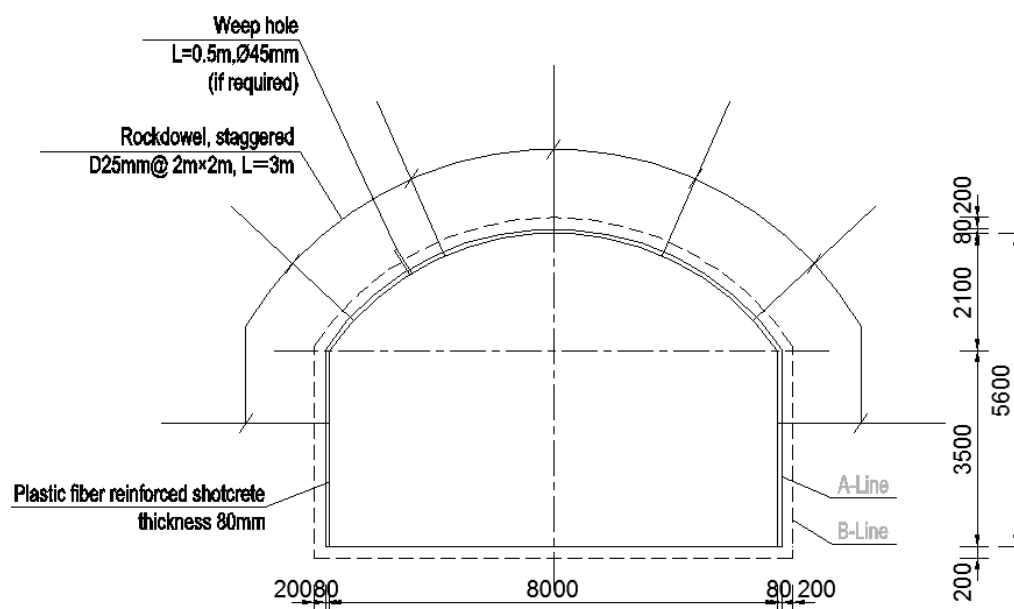


Figure 1.6 Typical section of turning adit (rock class III)

Surrounding Rock Stability Calculation of Adit No.3

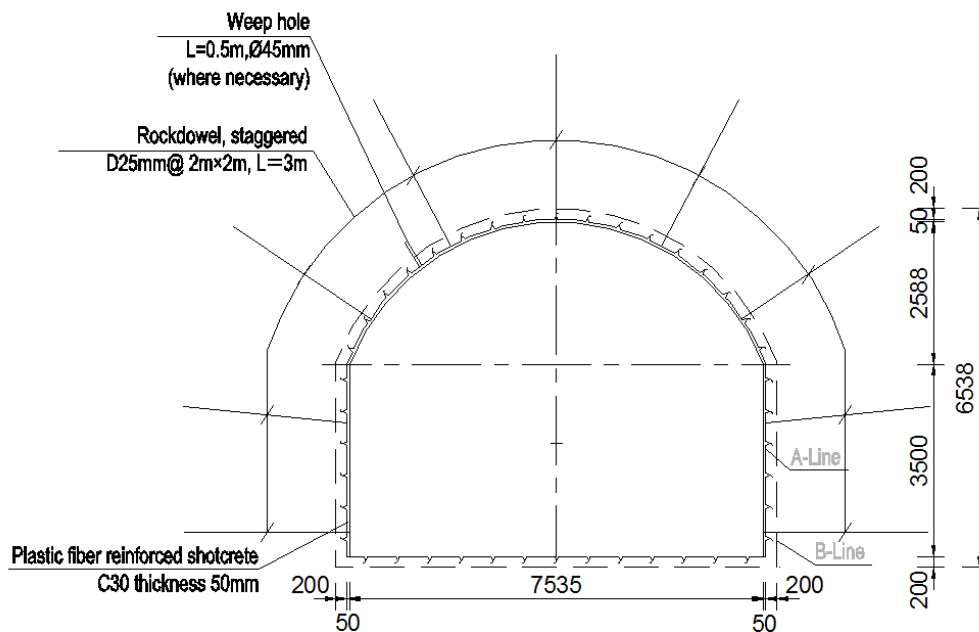


Figure 1.7 Typical section of Junction (rock class II)

1.2 Design Objective

This calculation only includes rock class I~IV, and the rock class V shall be considered separately according to the actual situation.

This calculation is provided for detailed design stage and aim to confirm the objectives which are as following:

- (1) to generally confirm the stability of the tunnel during construction;
- (2) to confirm (or adjust) the previously suggested support measures in the construction drawings.

1.3 Purpose and Contents

- (1) Contract documents, Employer's Requirement;
- (2) Tunnels and shafts in Rock (EM 1110-2-2901);
- (3) Rock Foundations (EM 1110-1-2908);
- (4) Building Code Requirements for Structural Concrete and Commentary (ACI 318)
- (5) Vlachopoulos, N. and Diederichs, M.S. (2009). Improved longitudinal displacement

Surrounding Rock Stability Calculation of Adit No.3

profiles for convergence-confinement analysis of deep tunnels. Rock Mechanics and Rock Engineering, 42(2), 131-146;

(6) The 2008 Kersten Lecture Integration of geotechnical and structural design in tunneling; To be presented at the opening keynote address, by Dr Evert Hoek, at the University of Minnesota 56th Annual Geotechnical Engineering Conference to be held in Minneapolis on 29 February 2008;

(7) Handbook Using the Q-system, Rock mass classification and support design;

(8) Paper: Rock-Support Interaction analysis for tunnels in weak rock masses;

(9) https://www.rocscience.com/help/rs2/tutorials/rs2_tunnel_lining_design.htm;

(10) Drawing: Excavation and initial support drawing of adit No.3 (Drawing No. UT1-C-150-CVL-DG-43004).

2 Theoretical Background of Calculations

2.1 Software

Software Phase 2D will be applied in the calculation. Phase2 is a powerful 2D finite element program for soil and rock applications. Phase2 can be used for a wide range of engineering projects including excavation design, slope stability, groundwater seepage, probabilistic analysis, consolidation, and dynamic analysis capabilities.

Software UNWEDGE is an interactive software for the stability analysis of three-dimensional wedge formed by structural discontinuity and underground excavation, which is used to analyze the underground excavation problem with discontinuous structural plane in rock mass. UNWEDGE calculates the safety factor of potentially unstable wedge, and can analyze the influence of support system on wedge stability.

2.2 Modelling Conditions, Material Law, Constitutive Model

The modelling conditions are plane strain. The material law is elasto-plastic combined with strain-softening (for rock). The rock mass is modelled as a continuum, homogeneous and isotropic. The failure criteria is the Mohr-Coulomb failure criteria.

Surrounding Rock Stability Calculation of Adit No.3

What needs to be emphasized is that such continuum model with homogeneous and isotropic material is a model, only, and does not necessarily reflect reality. In reality, the displacements occur in blocky rock masses always along discontinuities (joints, foliation etc.), which leads to loosening of the rock mass. The determined plastic zone in the continuums model represents an area of the rock mass where rock blocks were displaced to each other (= loosening of rock mass). In reality, it does not represent an area where the material was subject to plastic flow, as in soil.

2.3 Calculation Methodology

Convergence-confinement analysis for tunnelling is a standard approach for preliminary analysis of anticipated wall deformation and support design in squeezing ground.

Convergence-confinement analysis is a widely used tool for preliminary assessment of squeezing potential and support requirements for circular tunnels in variety of geological conditions and stress states. An analytical plasticity solution such as that developed by Carranza-Torres and Fairhurst (2000) is applied to a circular opening in an isotropic stress field. An internal pressure, initially equal to the in-situ stress is applied on the inside of the excavation boundary. The pressure is incrementally relaxed until the excavation boundary condition is that of zero normal stress. The extent of plastic yielding and thereby, the boundary deformation is calculated at each stage of the process. The result is a continuous representation of the deformation-internal pressure relationship for the tunnel given a particular material strength, deformability, dilation and stress state.

The internal pressure is, of course not a representation of reality but rather a surrogate for the effect of the gradual reduction of the radial resistance provided by the initially present tunnel core (material inside the tunnel boundary) transitioning to an exposed boundary with a progressively distant tunnel face and ultimately a long open tunnel

Surrounding Rock Stability Calculation of Adit No.3

with plane strain conditions. The internal pressure that is coupled with a given boundary displacement is a measure of the amount of support resistance required to prevent further displacement at that point in progressive tunnelling model.

Elastic deformation of the rock mass starts about two diameters ahead of the advancing face and reaches its maximum value at about two diameters behind the face. At the face position about one third of the total radial closure of the tunnel has already occurred and the tunnel face deforms inwards as illustrated in Fig. 2.1. Whether or not these deformations induce stability problems in the tunnel depends upon the ratio of rock mass strength to the in-site stress level. The tunnel displacement profiles for the roof and the invert of a tunnel are shown schematically in the Fig. 2.2.

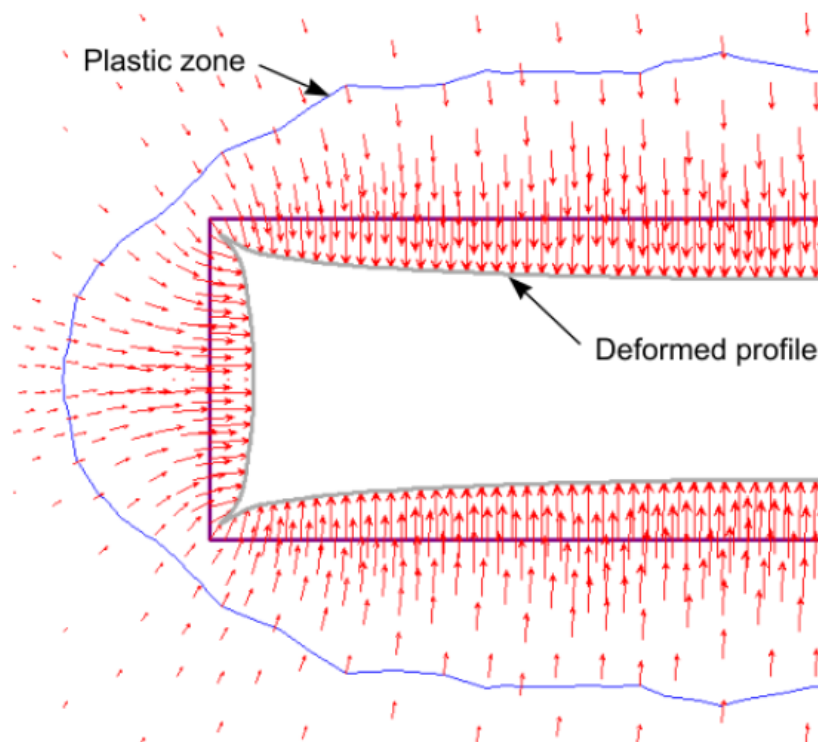


Figure 2.1 The shape of the deformed tunnel profile and displacement vectors

Surrounding Rock Stability Calculation of Adit No.3

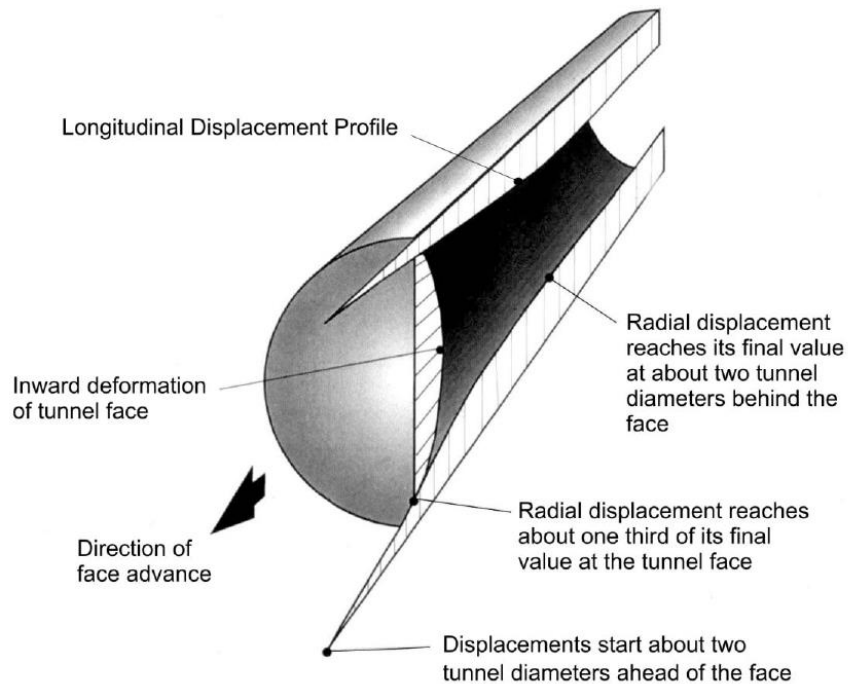


Figure 2.2 pattern of elastic deformation in the rock mass surrounding an advancing tunnel

The equations can be found in the Kersten Lecture, appendix 1(Hoek et.al.,2008)

According to the formula listed in geological rock classification and documentation “Integration of geotechnical and structural design in tunneling (Hoek, E., Carranza-Torres, C., Diederichs, M.S. and Corkum, 2008)”. The calculation formula of supporting time is as follow:

$$\frac{u_0}{u_{\max}} = \frac{1}{3} e^{-0.15 P_r}$$

$$P_r = R_p / R_t$$

$$d_t = \frac{X}{R_t}$$

$$\frac{u}{u_{\max}} = \begin{cases} \frac{u_0}{u_{\max}} e^{d_t} & \text{when } X < 0 \\ 1 - \left(1 - \frac{u_0}{u_{\max}}\right) e^{\frac{-3d_t}{2P_r}} & \text{when } X > 0 \end{cases}$$

where,

Surrounding Rock Stability Calculation of Adit No.3

R_p —The maximum plastic zone depth, m;

u_0 —The radial displacement of tunnel face, m;

R_t —Tunnel radius, m;

X —Distance from the initial support to the tunnel face, m;

u_{max} —The maximum radial displacement, m.

With these analytical equations it is possible to estimate the amount of displacements at the specified location of support installation, if the plastic radius and displacement far from the tunnel face are known. Therefore, to get the displacements and the radius of the plastic zone far away from the tunnel face (where the internal pressure is zero). It is necessary to calculate numerically with Phase 2 the tunnel without support, first.

With the determined displacement profile along the tunnel and a given location of support installation, the modeler selects the corresponding deformation.

In the next step the tunnel advance is modelled in Phase 2 by reducing the internal pressure in the future tunnel until the corresponding deformation is reached, when support is installed. The modeler installs now the support in the model. The internal pressure is then reduced to zero by factor the field stress zero. Further numerical calculation leads to loading of the support.

2.4 Maximum Unsupported Span

The maximum unsupported span is calculated by the following formula as per EM 2901: $X = 2 \text{ ESR } Q^{0.4}$

Where, X is maximum unsupported span, ESR is excavation support ratio, taken as 1.3. Q values and calculated and applied maximum unsupported spans are shown in Table

错误!文档中没有指定样式的文字。-1:

Table 错误!文档中没有指定样式的文字。-1 Maximum unsupported span of tunnel excavation

Surrounding Rock Stability Calculation of Adit No.3

Rock class	Q Value	Calculated maximum unsupported span(m)	Maximum unsupported span for application, X(m)
I	40	11.4	11
II	25	9.4	9
III	7	5.7	5
IV	2.5	3.8	3

2.5 Ground Characteristic Curve

Define the relationship between stress release ratio λ_i and the tunnel deformation u_i for an advancing tunnel in stress field. A plot of u_i versus λ_i , the curve is based on the assumption that the rock at the tunnel face provides an initial support pressure equal to the in-situ stress. As the tunnel face advances and the face moves away from the section under consideration, the support pressure gradually decreases until it reaches zero at some distance behind the face. The characteristic curve of class I~IV are shown as below.

Surrounding Rock Stability Calculation of Adit No.3

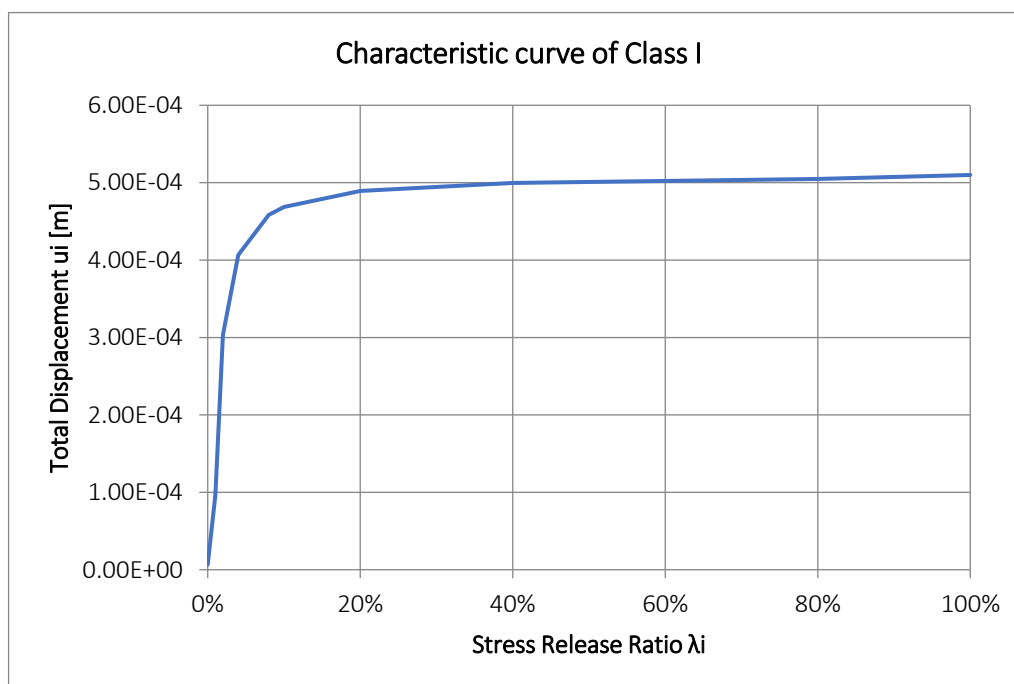


Figure 2.3 Characteristic curve of class I

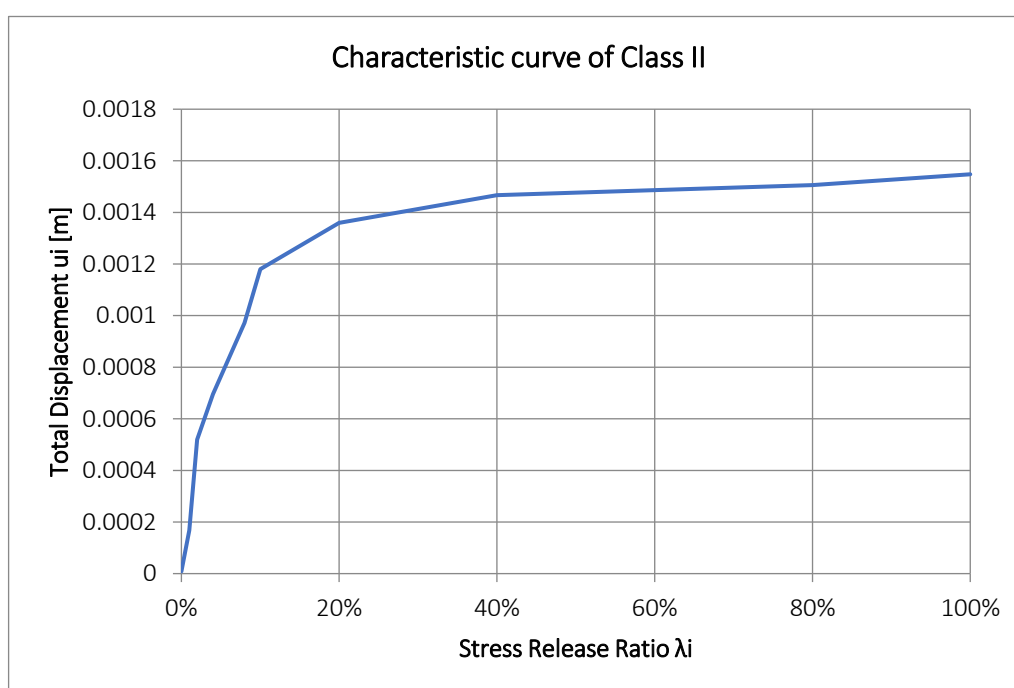


Figure 2.4 Characteristic curve of class II

Surrounding Rock Stability Calculation of Adit No.3

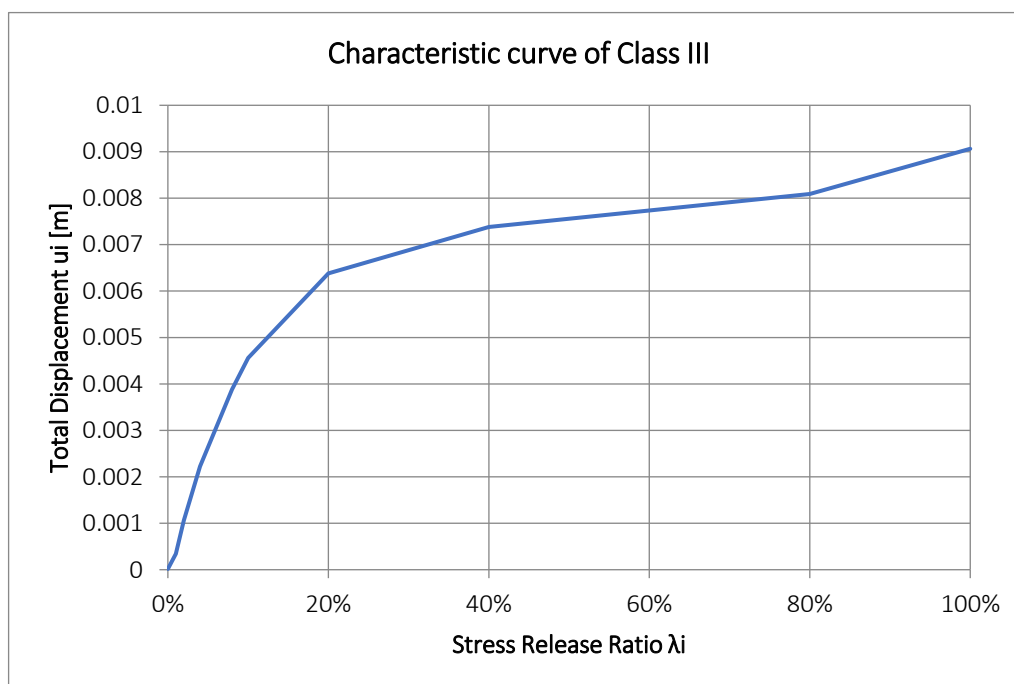


Figure 2.5 Characteristic curve of class III

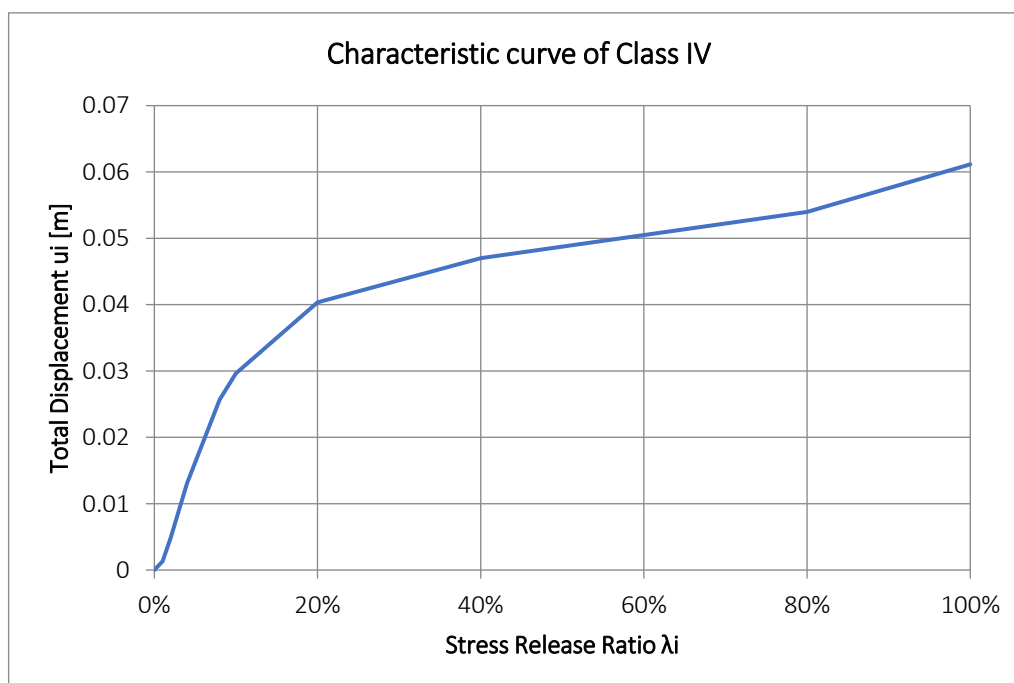


Figure 2.6 Characteristic curve of class IV

Surrounding Rock Stability Calculation of Adit No.3

2.6 Longitudinal displacement profile (LDP) for tunnel

The Longitudinal Displacement Profile (LDP) is required in order to establish the relative position of the tunnel face and the section under consideration.

According to the LDP equations, presented above, the LDP curve of every rock mass class are shown in the table below.


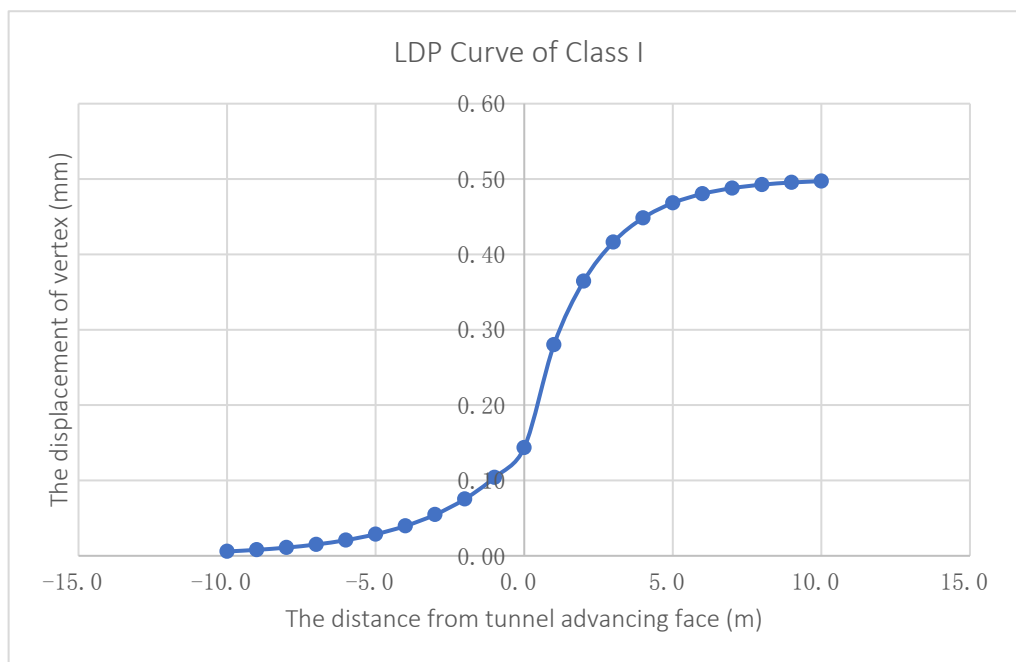


Figure 2.7 Longitudinal Displacement Profile curve of class I

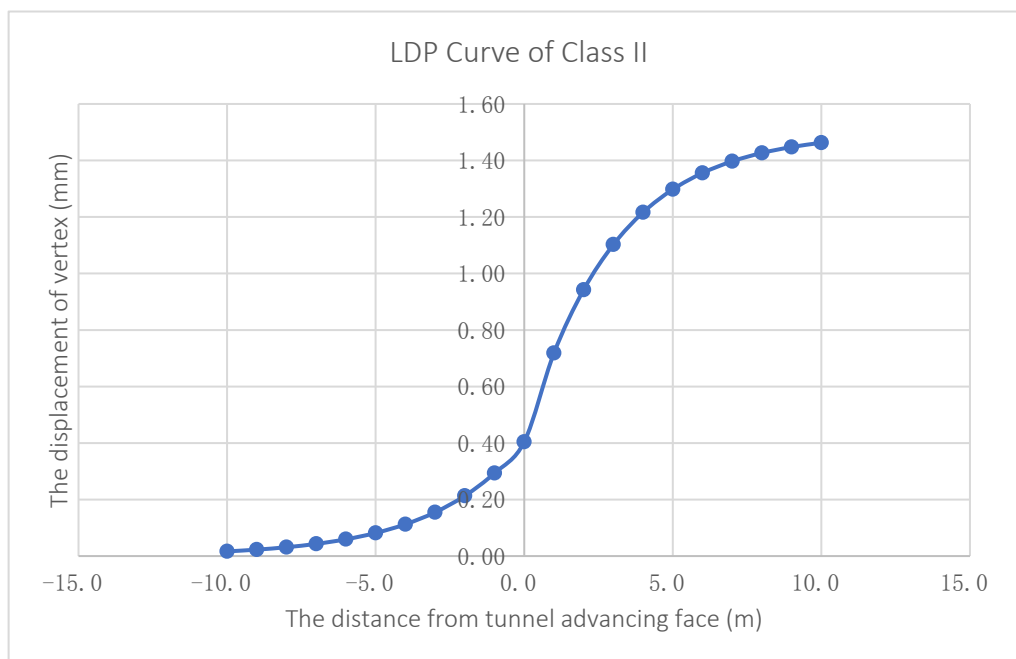

Surrounding Rock Stability Calculation of Adit No.3

Figure 2.8 Longitudinal Displacement Profile curve of class II

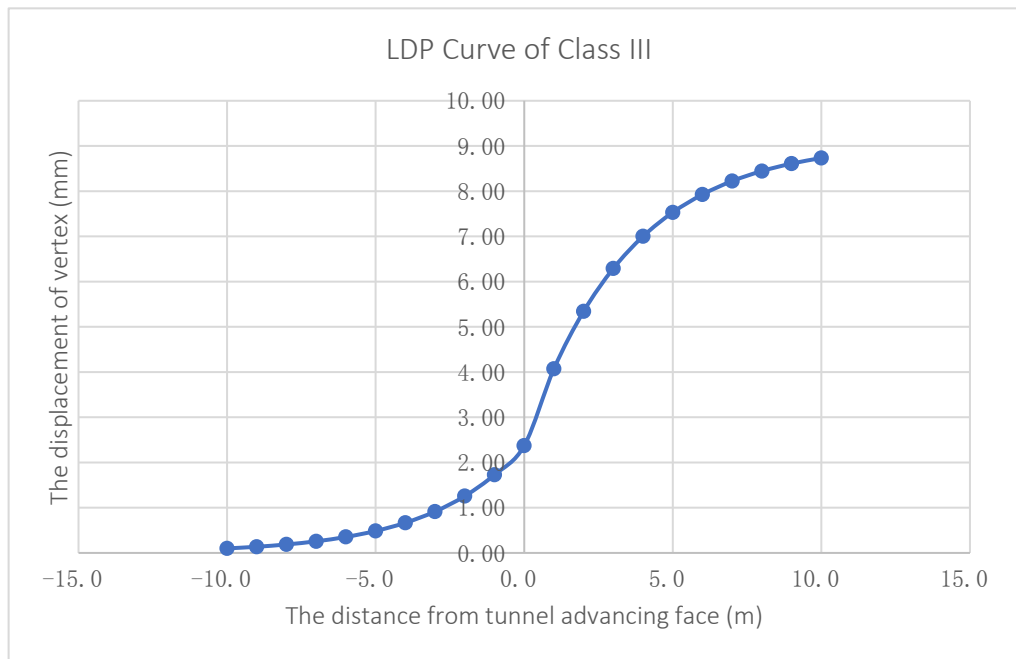


Figure 2.9 Longitudinal Displacement Profile curve of class III

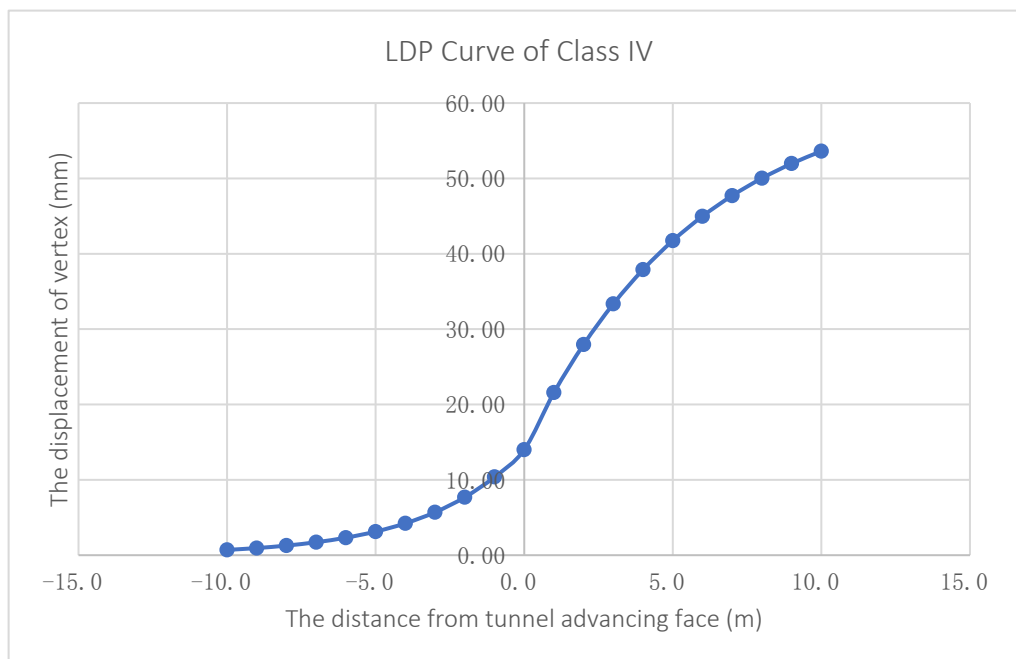


Figure 2.10 Longitudinal Displacement Profile curve of class IV

According to Characteristic Curve and LDP Curve of class I~IV, it is determined to adopt the relaxation of stress at the supporting time shown as below.

Surrounding Rock Stability Calculation of Adit No.3

Table 错误!文档中没有指定样式的文字。 -2 Relaxation of rock mass

Rock Class	Supporting time X (m)	Plastic zone radius R_p (m)	Vertex displacement U_{max} (mm)	$\frac{u}{u_{max}}$ Closure ratio	Stress Relaxation Percentage (%)
I	11	3.62	0.5	0.99	95
II	9	4.44	1.5	0.97	95
III	5	5.15	9.1	0.83	90
IV	3	8.84	62.5	0.53	85

Relaxation refer to that (100-Relaxation)% of surrounding rock stress is undertaken by rock and support, Relaxation % release during excavation. The stress relaxation percentage has already considered the margin of safety.

3 Properties of Materials

3.1 Rock Mass Properties

The mechanical parameters of surrounding rock are shown in Table 3.3.

Table 3.1 Mechanical parameter of surrounding rock

Class of surrounding rock	Unit weight	Uniaxial compressive strength (UCS) of intact rock	Elastic modulus Of rock mass	Poisson's ratio of rock mass	Rock mass/rock mass shear (shearing) strength				Uniaxial compressive strength of rock mass, (UCS)	Tensile Strength of rock mass
					Peak		Residual			
	γ (kN/m ³)	σ_c (MPa)	E_m (GPa)	μ	Φ_{peak} (°)	C_{peak} (MPa)	Φ_{res} (°)	C_{res} (MPa)	σ_{cm} (MPa)	σ_{tm} (MPa)
I	27.0	60	30.0	0.20	50	5.0	40	3.33	27.5	2.75
II	27.0	60	20.5	0.25	48	2.5	38	1.67	13.0	1.3
III	26.5	60	7.5	0.27	45	1	36	0.66	4.2	0.42
IV	26.0	60	2.3	0.30	35	0.5	28	0.33	1.9	0.19

Note: 1) Residual strength parameters shall be reduced by 1/3 for the cohesion and 20% for the friction angle; 2) Dilation angle was estimated at 1/3 of the friction angle; 3) Tensile strength of rock mass is taken as 10% of uniaxial compressive strength of rock mass.

Surrounding Rock Stability Calculation of Adit No.3

3.2 Shotcrete

- a) Plastic fiber shotcrete: unit weight: 24.0kN/m³;
- b) The Elastic moduli are calculated as formula $E_c = 4700 \cdot f_c'^{0.5}$ (ACI 318, section 19.2.2 Modulus of elasticity).

Table 3.2 Shotcrete strength and elastic modulus

Compressive strength f_c' (MPa)	Elastic modulus E_c (MPa)	Poisson ratio
25	23500	0.2
30	25743	0.2

3.3 Rock Dowels

Rock dowel type: Cement mortar full length bonded dowel

- 1) Yield strength: 500MPa
- 2) Compressive/Tensile strength: 545MPa
- 3) Elastic modulus: 210,000MPa
- 4) Tensile strength of rock bolt steel: 500MPa/1.5=333MPa,

And the value 1.5 is safety factor.

Ultimate bearing capacity of rock dowel is calculated from formula below:

$$F = 0.5\pi d L \tau_{ult}$$

Where,

d = Effective diameter of borehole;

L = Length of grouted portion of anchor;

t = Working bond strength;

τ_{ult} = The ultimate bond strength at failure, the ultimate bond stress is often taken as 1/10 of the uniaxial compressive strength of the rock or grout (whichever is less) (Littlejohn 1977) up to a maximum value of 4.2 MPa.

Table 3.3 The ultimate bearing capacity calculation of rock dowel

Rock classification	Unit	II	III	IV
UCS	MPa	60	60	60
Rock dowel diameter	mm	25	25	25

Surrounding Rock Stability Calculation of Adit No.3

Rock dowel area	mm ²	491	491	491
Ultimate bond strength of rock dowel τ_{ult}	kPa	4200	4200	4200
Effective diameter of rock dowel borehole d	mm	50	50	50
Bond strength of unit length $F=0.5\pi d\tau_{ult}$	MN/m	0.33	$0.5\pi \times 50 \times 4200 / 10^6 = 0.33$	0.33
Tensile strength of rock dowel steel	MPa	333	333	333
Tensile peak value of rock dowel	MN	0.164	$491 \times 333 / 10^6 = 0.164$	0.164

3.4 Lattice Girder and Reinforcing Bar

The mechanical parameters of reinforcing bar are shown as below.

Table 3.4 Mechanical parameter for reinforcing bar

Yield strength (MPa)	Tension strength(MPa)	Elastic modulus E_c (MPa)	Poisson ratio
500	545	210,000	0.3

3.5 Steel support

MB150 H-beam type steel rib is used. And the mechanical parameters of steel support are shown as below.

Table 3.5 Mechanical parameter for steel support

Yield strength (MPa)	Tension strength(MPa)	Elastic modulus E_c (MPa)	Poisson ratio
250	400	210,000	0.3

4 Initial Proposed Tunnel Supports

4.1 Tunnel Support of Excavation Class

The initial proposed supports for each rock type are shown as below.

Table 错误!文档中没有指定样式的文字。-3 Initial proposed supports for each rock type

Item	Unit	Initial proposed supports			
		I	II	III	IV
Shotcrete thickness	mm	Spot	50	80	100
Shotcrete strength	MPa	21	21	21	21

Surrounding Rock Stability Calculation of Adit No.3

Rock dowel length	m	3.0	3.0	3.0	3.0
Rock dowel spacing within each row	m	spot	spot	2.0	1.5
Rock dowel row spacing	m	spot	spot	2.0	1.5
Steel support/Lattice girder spacing	m				spot

4.2 Safety Factor

- (1) The support safety factor for shotcrete and rock dowel are 1.5.
- (2) The minimum safety factor for wedges analysis is 2.0.

5 Model Set-up, Boundary and Loading Conditions, Stress Initiation

For simplicity, the model will not extend to the ground surface, and the boundary of model is set 10 times tunnel width/height, but to apply corresponding stresses at the model's upper boundary.

For the case of gravitational loading, only, boundary and loading conditions to be set as shown below. This applies for tunnels in the UT1-Project that are oriented NNE-SSW (+/- 45°), as NE-SSW is generally orientation of the maximum horizontal stress σ_H in the Upper Himalaya, which is in the plane-strain Phase2-model the ("irrelevant") out-of-plane stress. Hence, initial stress conditions in the model can be calculated by gravitational loading, or by specifying the relative ground surface elevation.

The finite element model for rock class I, II, III, IV is shown as **错误!未找到引用源。**, and the corresponding gravitational loading is shown in the **错误!未找到引用源。**.

Surrounding Rock Stability Calculation of Adit No.3

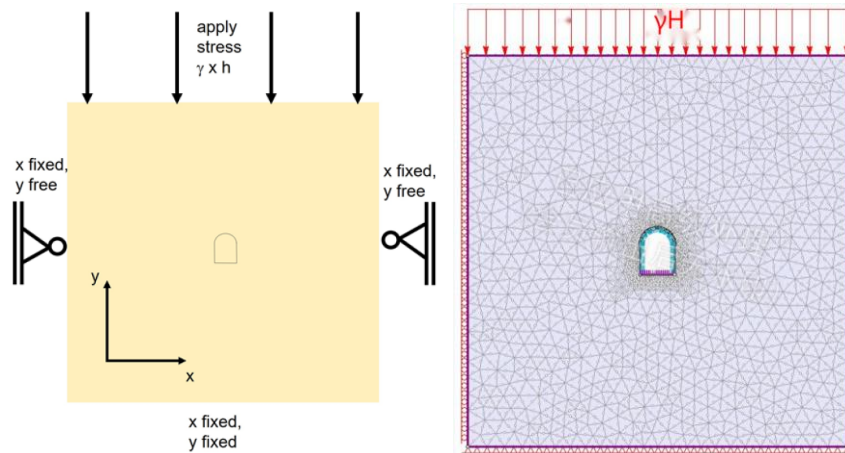


Figure 5.1 Finite element model and gravitational loading

Table 5.1 gravitational loading for surrounding rock

Rock class/ Location	Tunnel buried depth	Rock unit weight	Overburden gravitational loading	Application location of Max. buried depth
	m	kN/m ³	MPa	
I	300	27	8.1	Refer to rock class II location
II	300	27	8.1	Whole tunnel
Junction	300	27	8.1	Class II
III	300	26.5	7.95	Whole tunnel
Turning bay	150	26.5	2.2	Class III
IV	200	26	5.20	Refer to rock class III location
	150	26	3.60	Intermediate value
	100	26	2.60	Inferred location geologically

6 Tunnel Modelling and Results

6.1 Rock Class I (MAX. Buried Depth 300m)

For surrounding rock class I without support, adopting the parameters listed in Section 3, and the calculated displacement and plastic zone are shown as below.

Surrounding Rock Stability Calculation of Adit No.3

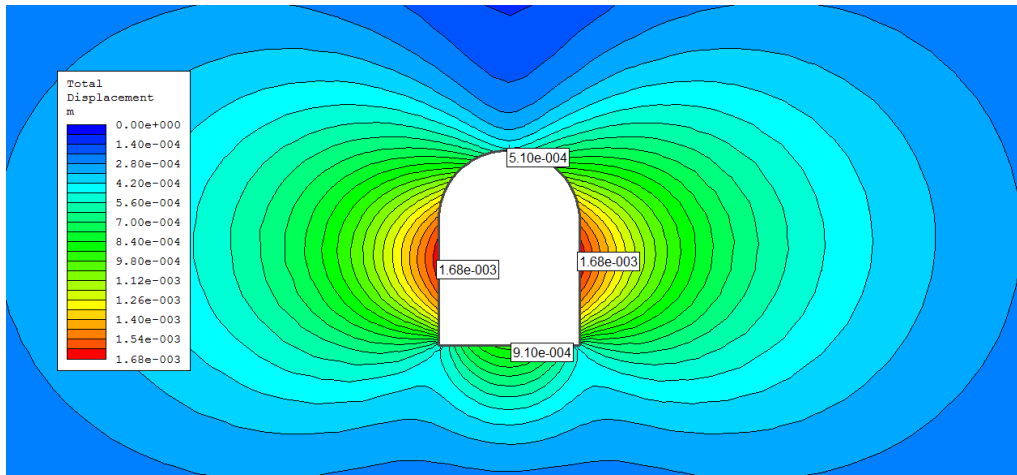


Figure 6.1 Plastic zone and total displacement without tunnel support

It can be seen that the maximum displacement is 0.5mm in roof and 0.9mm in invert, and almost no plastic zone. In terms of stability, the plastic fiber shotcrete may be required when necessary.

6.2 Rock Class II (MAX. Buried Depth 300m)

For rock class II, according to LDP curve and Characteristic curve presented in section 2, it is determined to choose **9m** as the max. unsupported distance at support installation. The displacement without tunnel support, the displacement after support installation, plastic zone and axial force of rock dowels, the safety factor of plastic fiber shotcrete/ steel rib (including shear and moment) are shown as following.

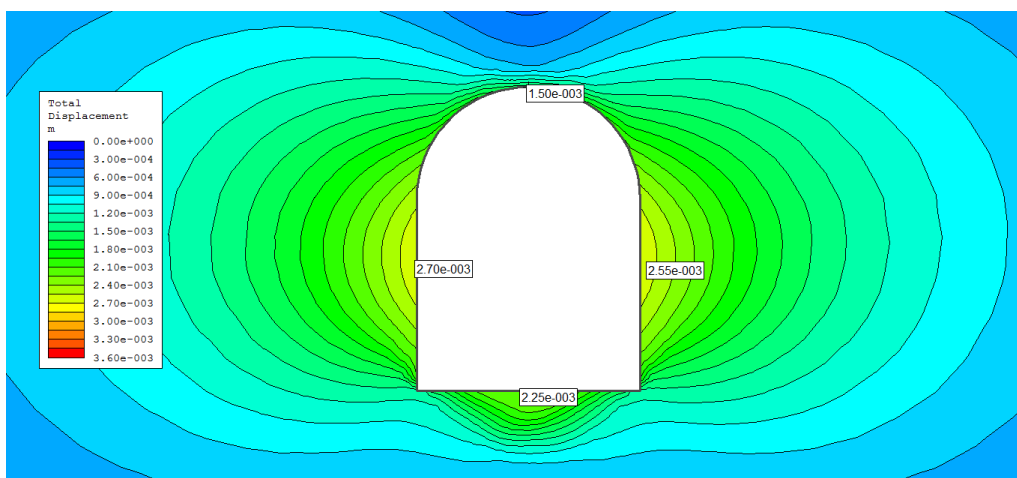


Figure 6.2 Total displacement without tunnel support

Surrounding Rock Stability Calculation of Adit No.3

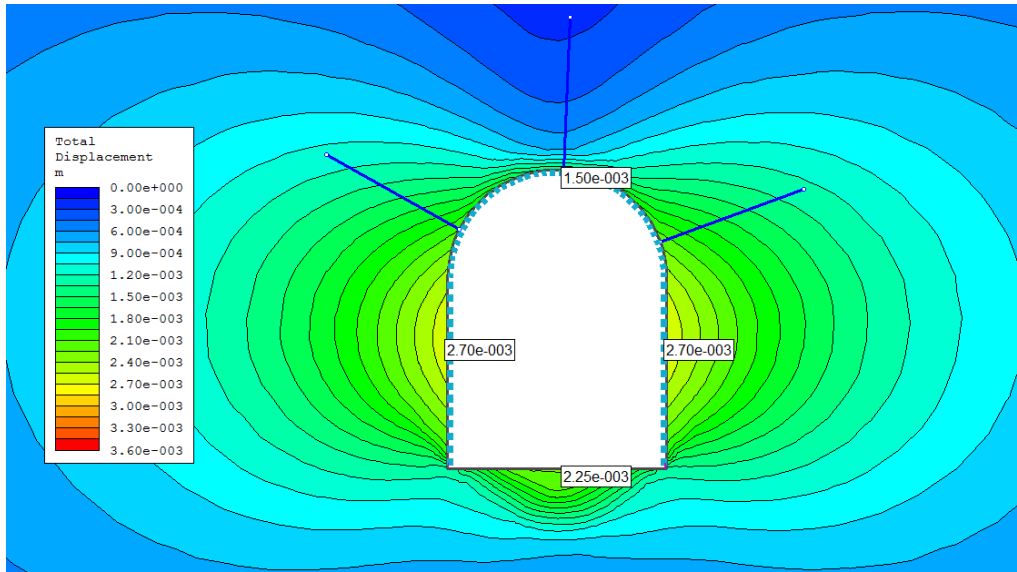


Figure 6.3 Total displacement after support installation

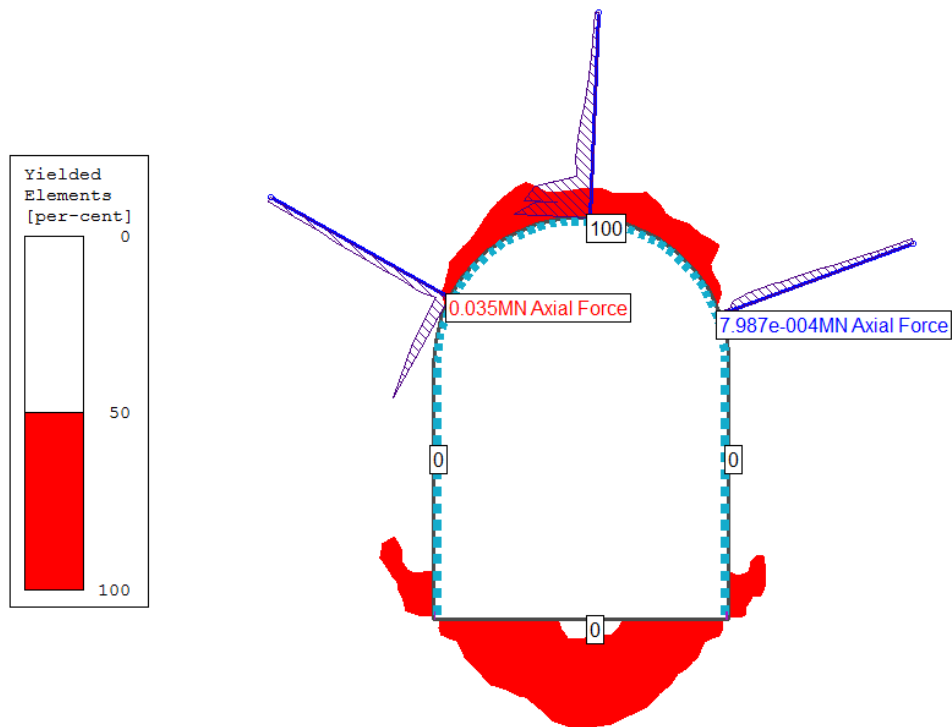


Figure 6.4 plastic zone and axial force of rock dowels after support installation

Surrounding Rock Stability Calculation of Adit No.3

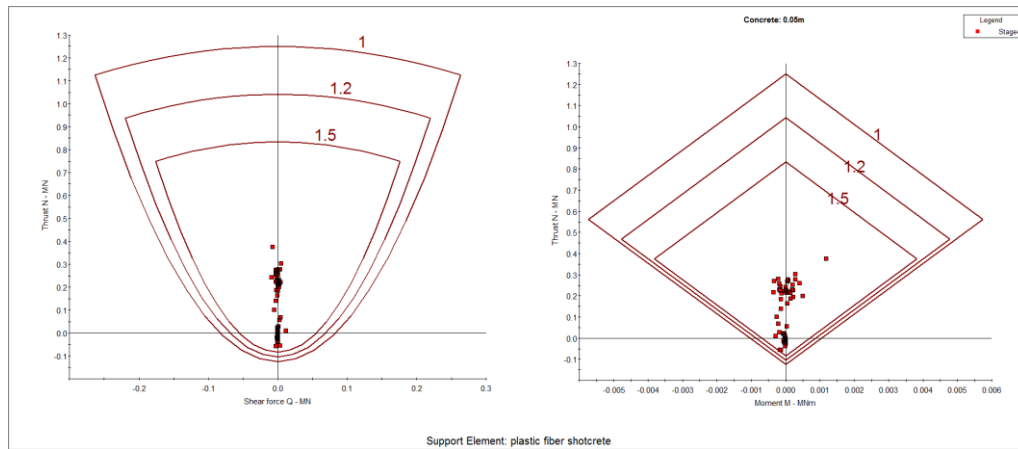


Figure 6.5 the safety factor of plastic fiber shotcrete

6.3 Rock Class III (MAX. Buried Depth 300m)

For rock class III, according to LDP curve and Characteristic curve presented in section 2, it is determined to choose **5m** as the max. unsupported distance at support installation. The displacement without tunnel support, the displacement after support installation, plastic zone and axial force of rock dowels, the safety factor of plastic fiber shotcrete/ steel rib (including shear and moment) are shown as following.

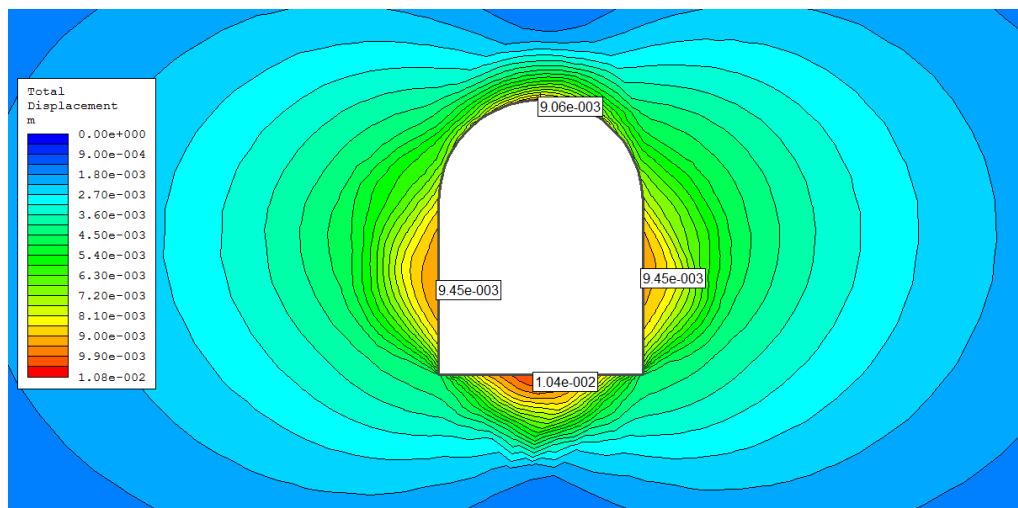


Figure 6.6 Total displacement without tunnel support

Surrounding Rock Stability Calculation of Adit No.3

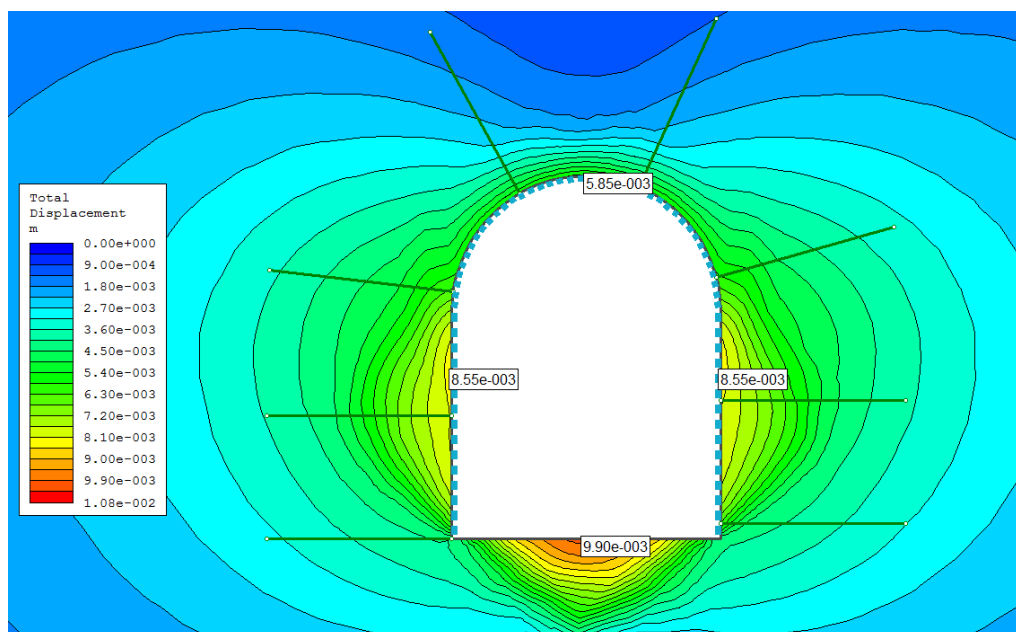


Figure 6.7 Total displacement after support installation

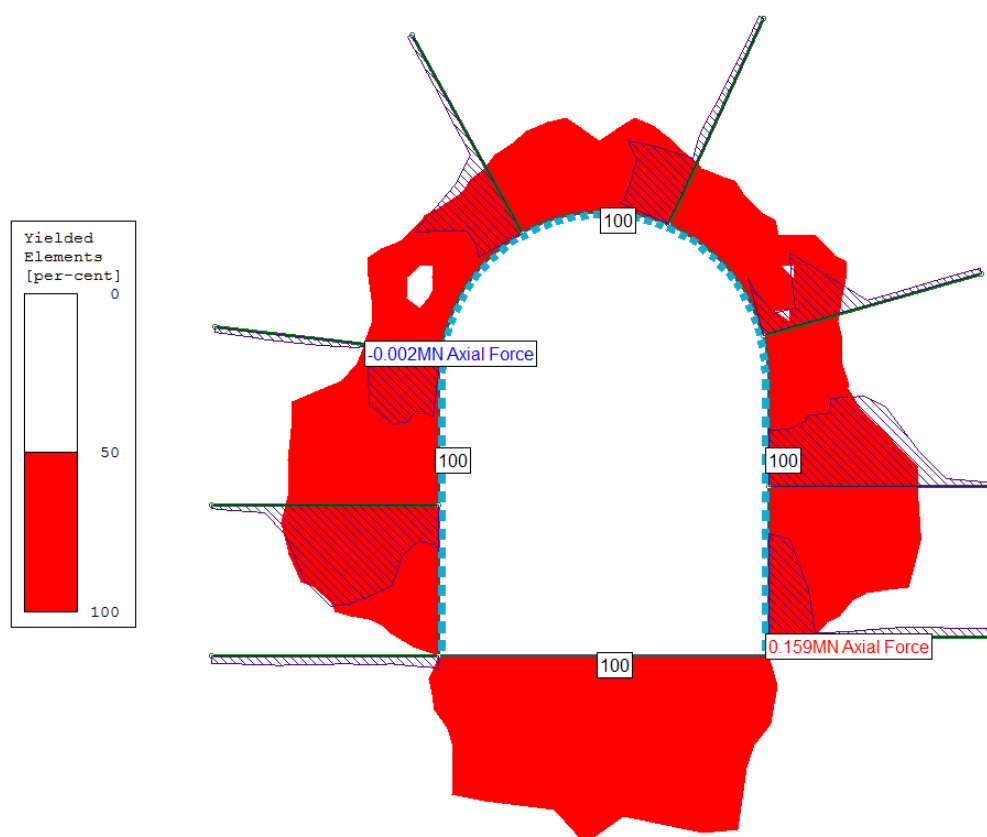


Figure 6.8 plastic zone and axial force of rock dowels after support installation

Surrounding Rock Stability Calculation of Adit No.3

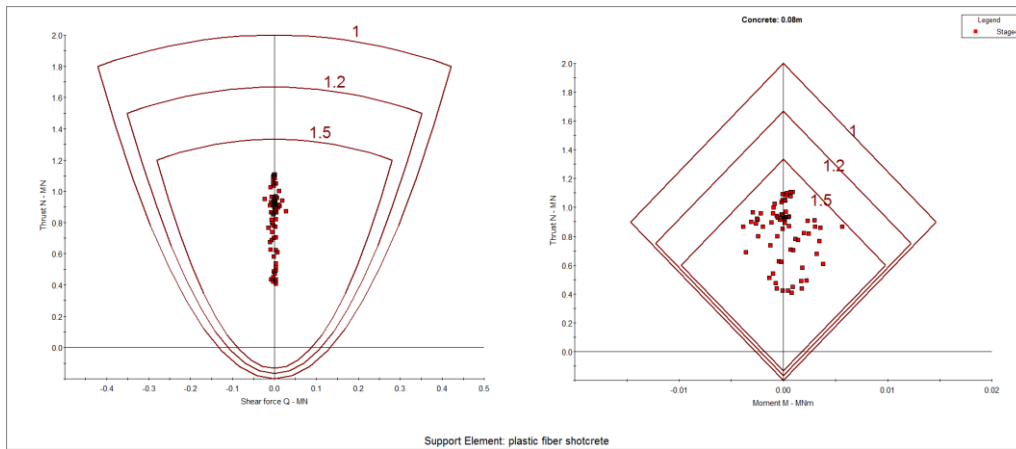


Figure 6.9 the safety factor of plastic fiber shotcrete

6.4 Rock Class IV (MAX. Buried Depth 100m)

For rock class IV, According to LDP curve and Characteristic curve presented as following, it is determined to choose **3m** as the max. unsupported distance at support installation.

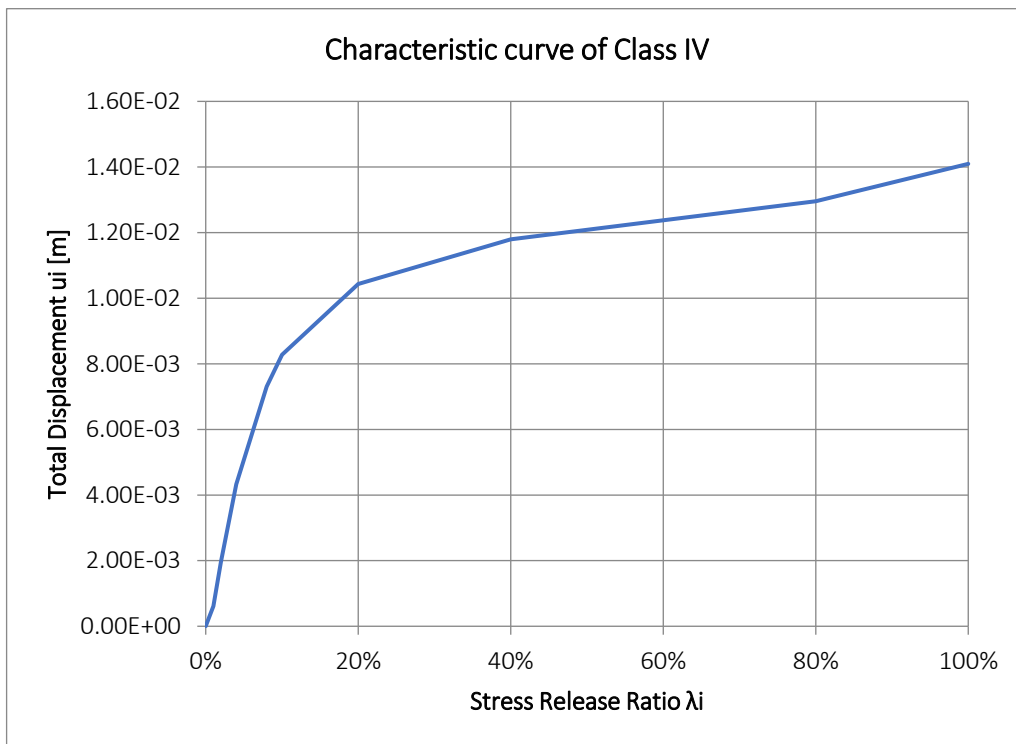


Figure 6.10 Characteristic curve

Surrounding Rock Stability Calculation of Adit No.3

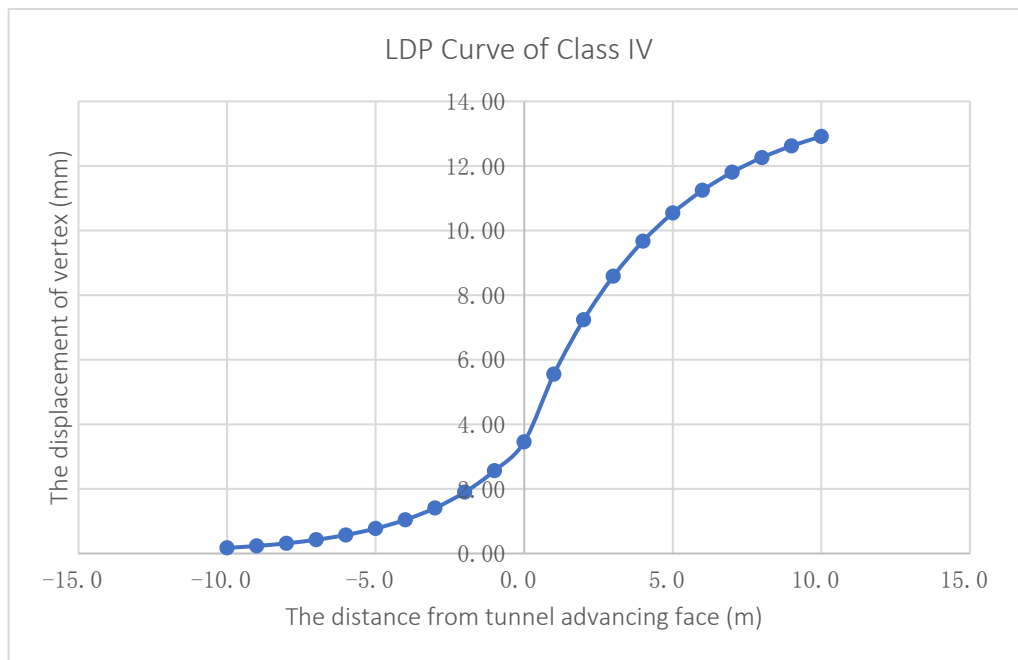


Figure 6.11 Longitudinal Displacement Profile curve

The displacement without tunnel support, the displacement after support installation, plastic zone and axial force of rock dowels, the safety factor of plastic fiber shotcrete/ steel rib (including shear and moment) are shown as following.

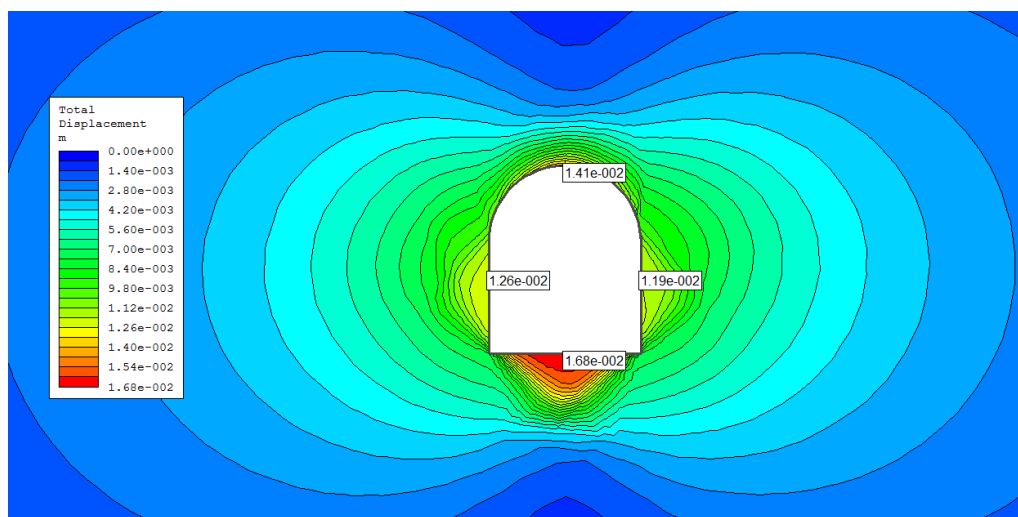


Figure 6.12 Total displacement without tunnel support

Surrounding Rock Stability Calculation of Adit No.3

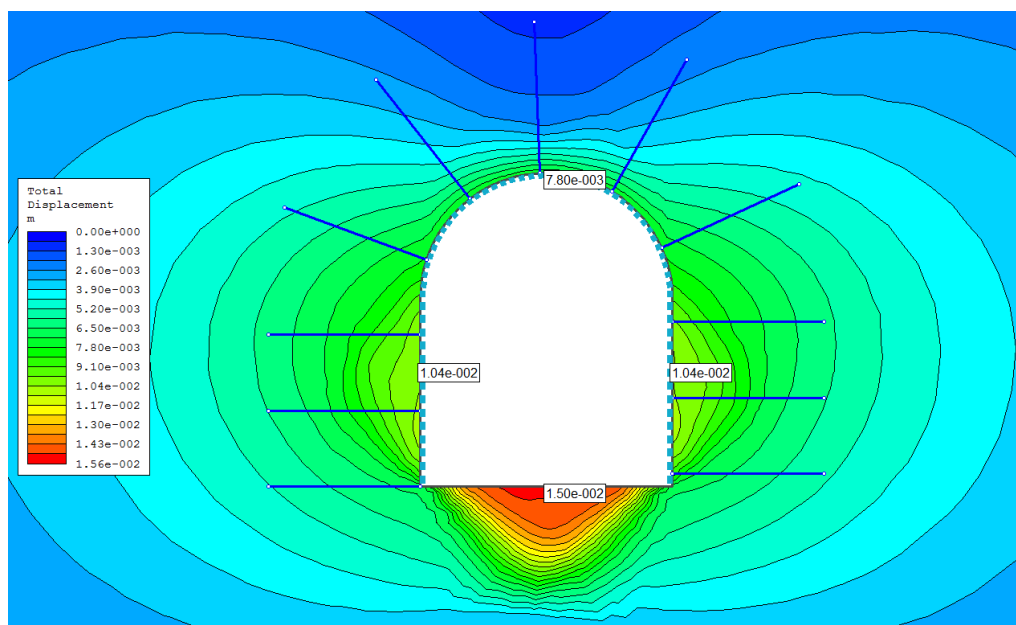


Figure 6.13 Total displacement after support installation

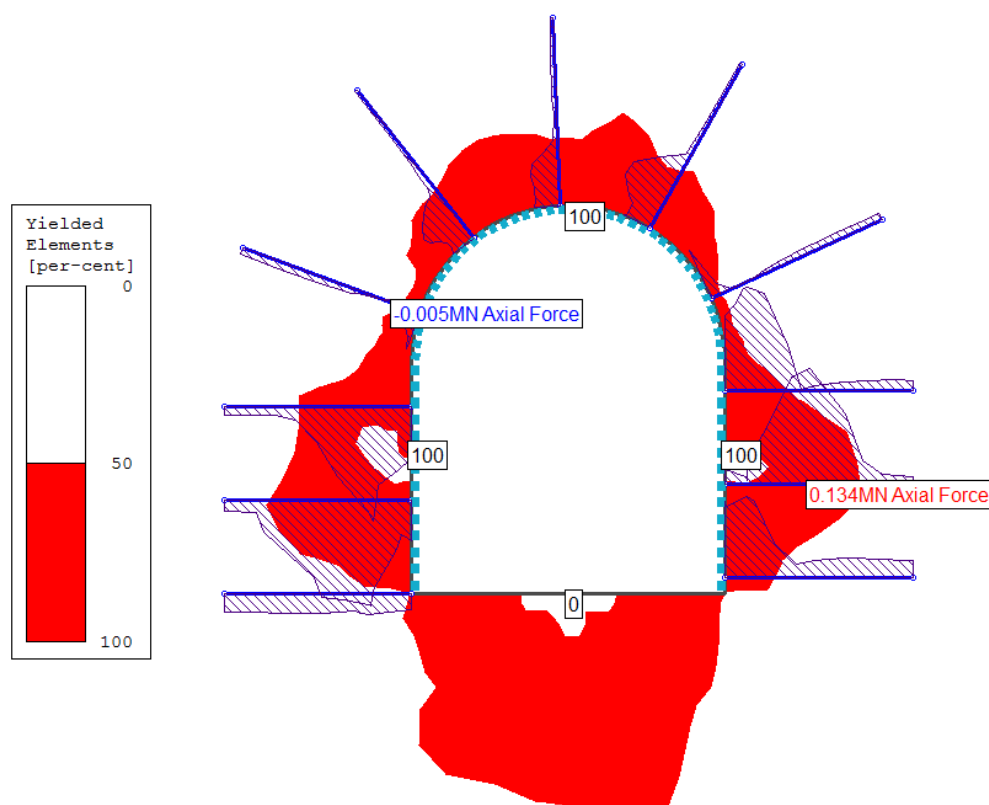


Figure 6.14 plastic zone and axial force of rock dowels after support installation

Surrounding Rock Stability Calculation of Adit No.3

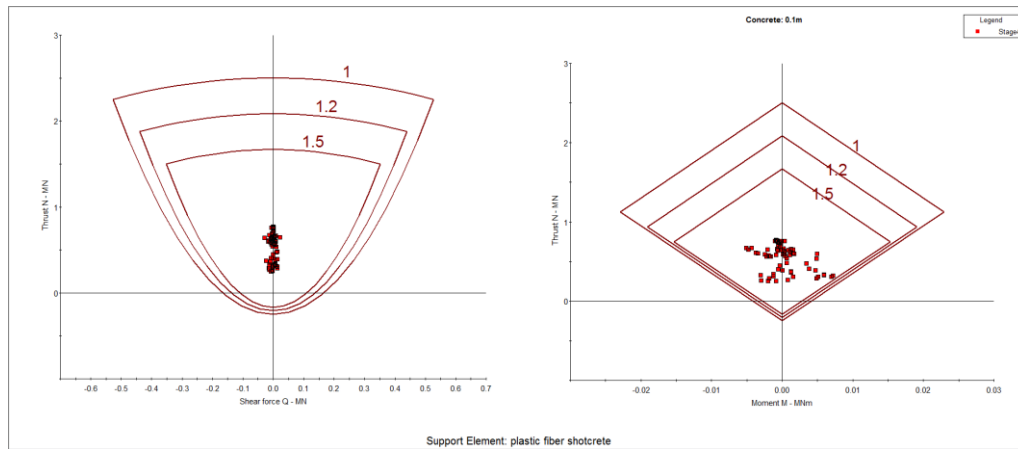


Figure 6.15 the safety factor of plastic fiber shotcrete

6.5 Rock Class IV (MAX. Buried Depth 150m)

For rock class IV, According to LDP curve and Characteristic curve presented as following, it is determined to choose **3m** as the max. unsupported distance at support installation.

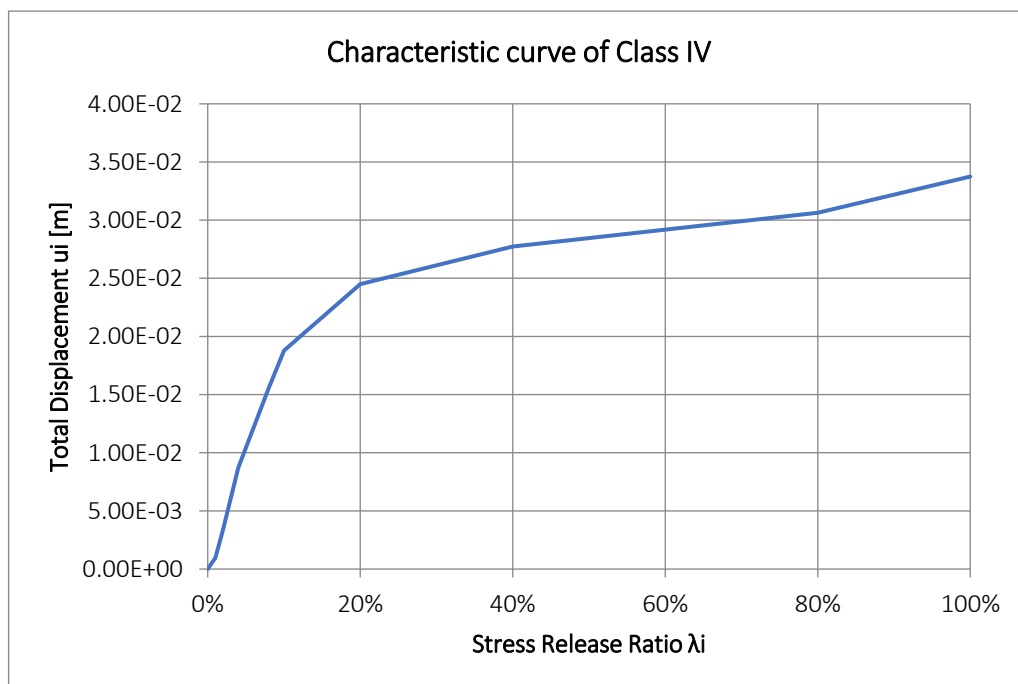


Figure 6.16 Characteristic curve

Surrounding Rock Stability Calculation of Adit No.3

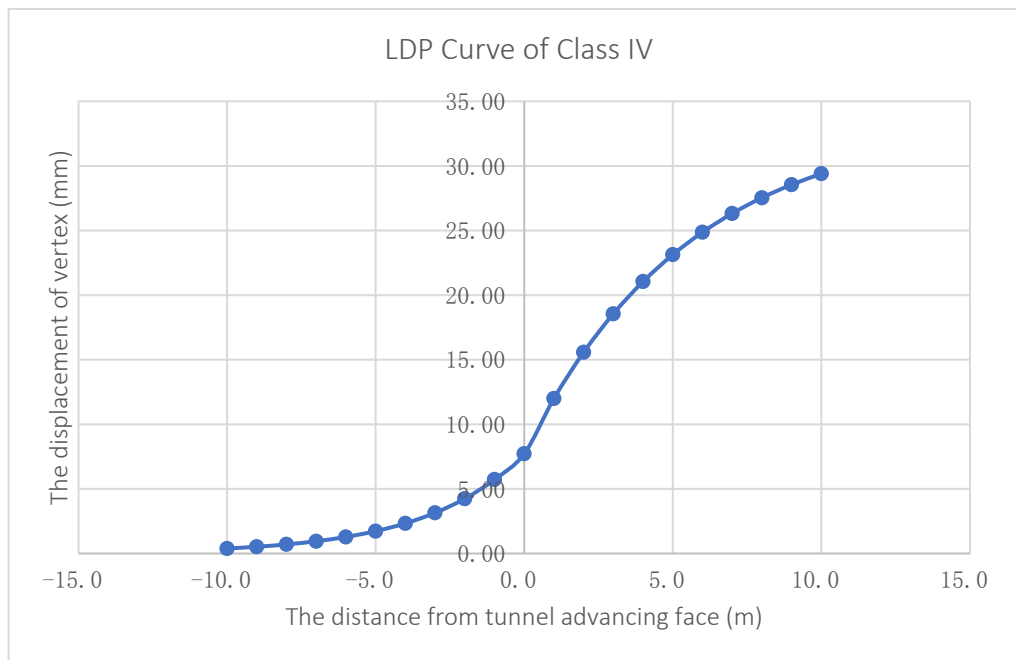


Figure 6.17 Longitudinal Displacement Profile curve

Some support system is considered:

- (1) The shotcrete thickness is increased to 0.12m;
- (2) The shotcrete strength is increased to 30MPa;
- (3) The spacing of Steel support is taken as 1m;
- (4) The spacing of rock dowel is decreased to 1m;

The displacement without tunnel support, the displacement after support installation, plastic zone and axial force of rock dowels, the safety factor of plastic fiber shotcrete/ steel rib (including shear and moment) are shown as following.

Surrounding Rock Stability Calculation of Adit No.3

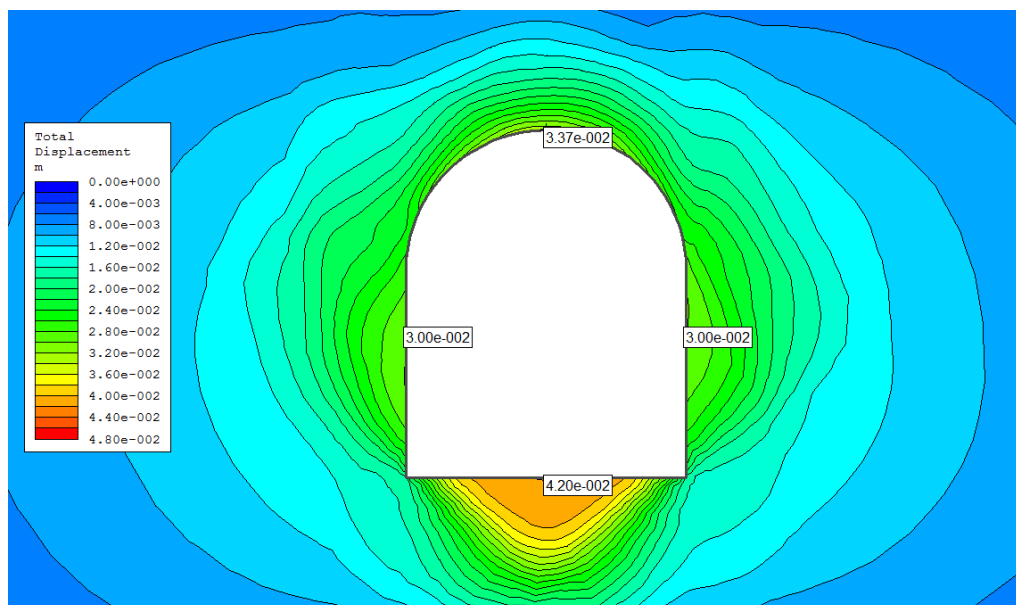


Figure 6.18 Total displacement without tunnel support

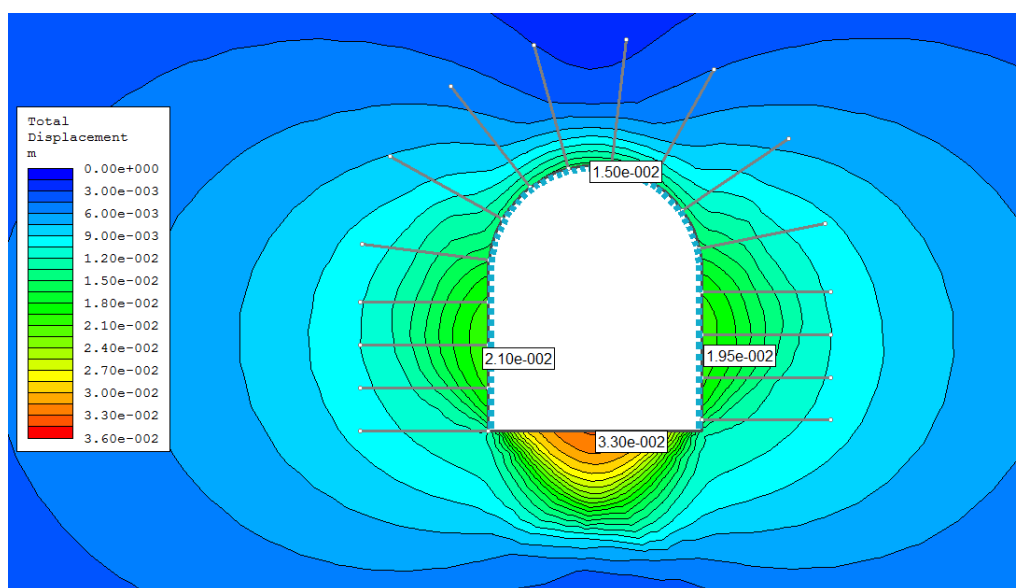


Figure 6.19 Total displacement after support installation

Surrounding Rock Stability Calculation of Adit No.3

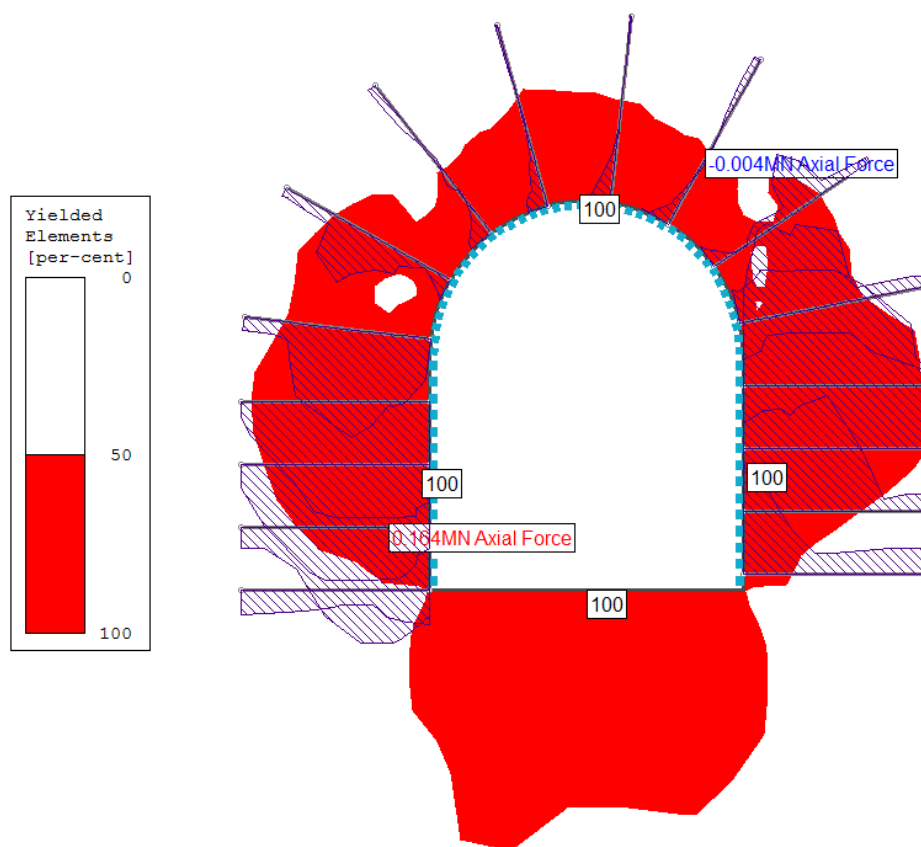


Figure 6.20 plastic zone and axial force of rock dowels after support installation

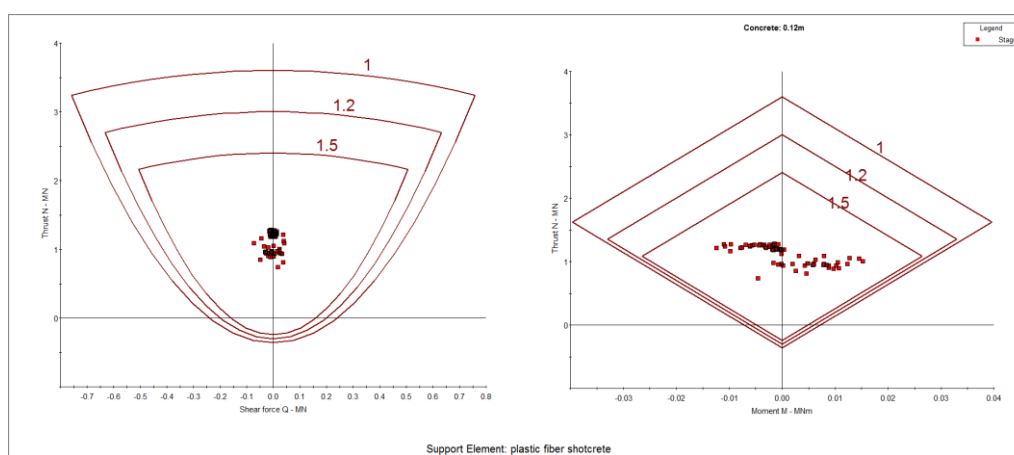


Figure 6.21 the safety factor of plastic fiber shotcrete

Surrounding Rock Stability Calculation of Adit No.3

6.6 Rock Class IV (MAX. Buried Depth 200m)

For rock class IV, according to LDP curve and Characteristic curve presented in section 2, it is determined to choose **3m** as the max. unsupported distance at support installation.

Some support system is considered:

- (1) The shotcrete thickness is increased to 0.16m;
- (2) The shotcrete strength is increased to 30MPa;
- (3) The spacing of Steel support is taken as 1m;
- (4) The spacing of rock dowel is decreased to 1m;
- (5) The length of rock dowel is increased to 3.5m.

The displacement without tunnel support, the displacement after support installation, plastic zone and axial force of rock dowels, the safety factor of plastic fiber shotcrete/ steel rib (including shear and moment) are shown as following.

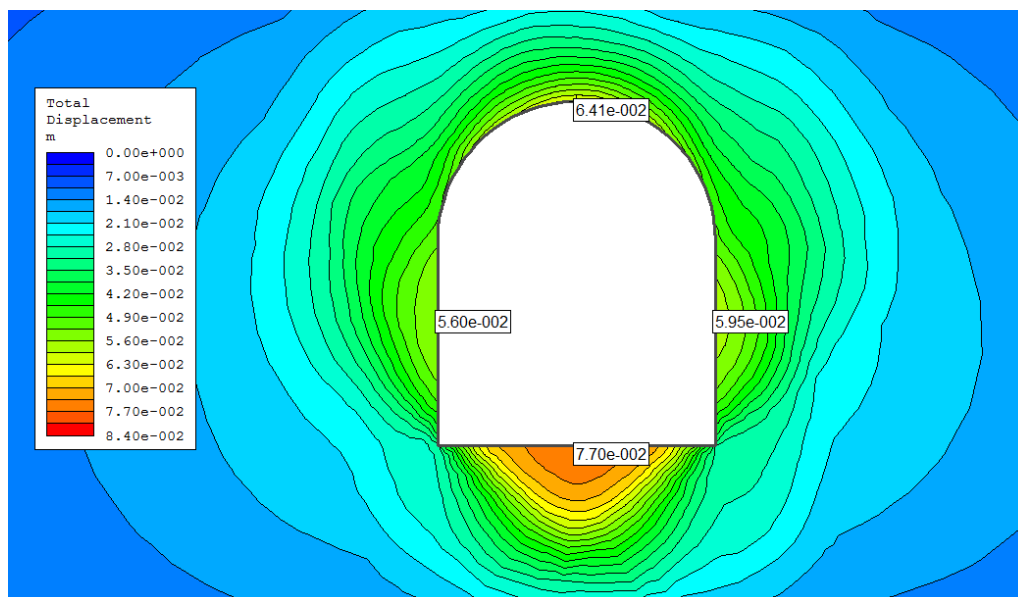


Figure 6.22 Total displacement without tunnel support

Surrounding Rock Stability Calculation of Adit No.3

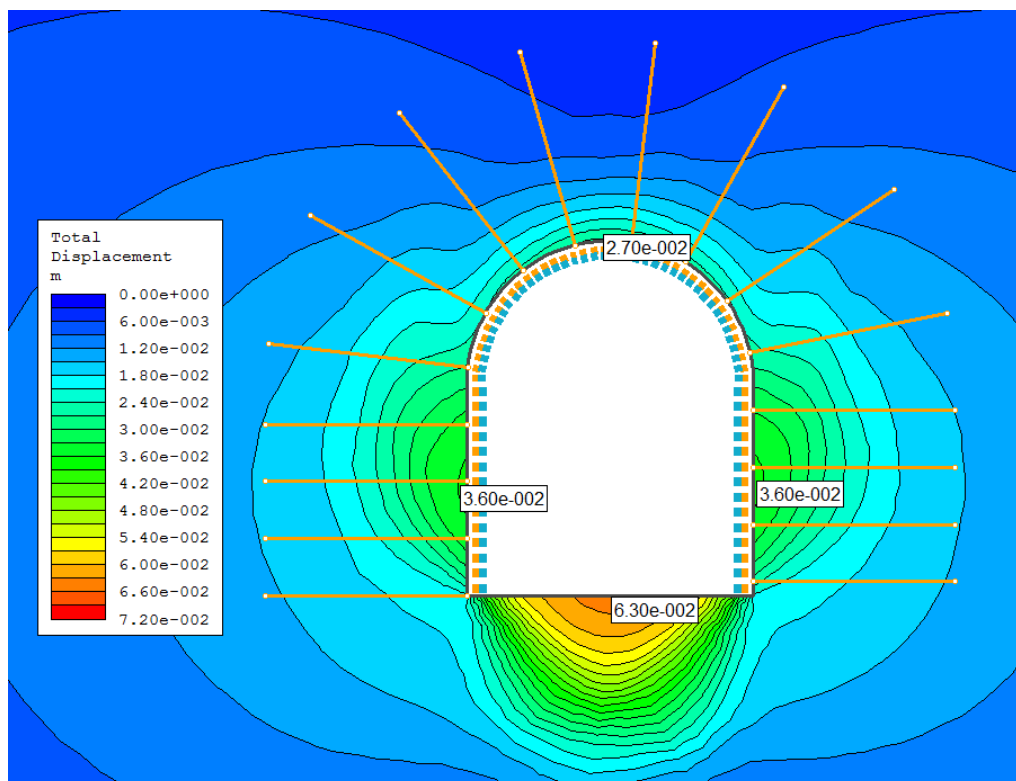


Figure 6.23 Total displacement after support installation

Surrounding Rock Stability Calculation of Adit No.3

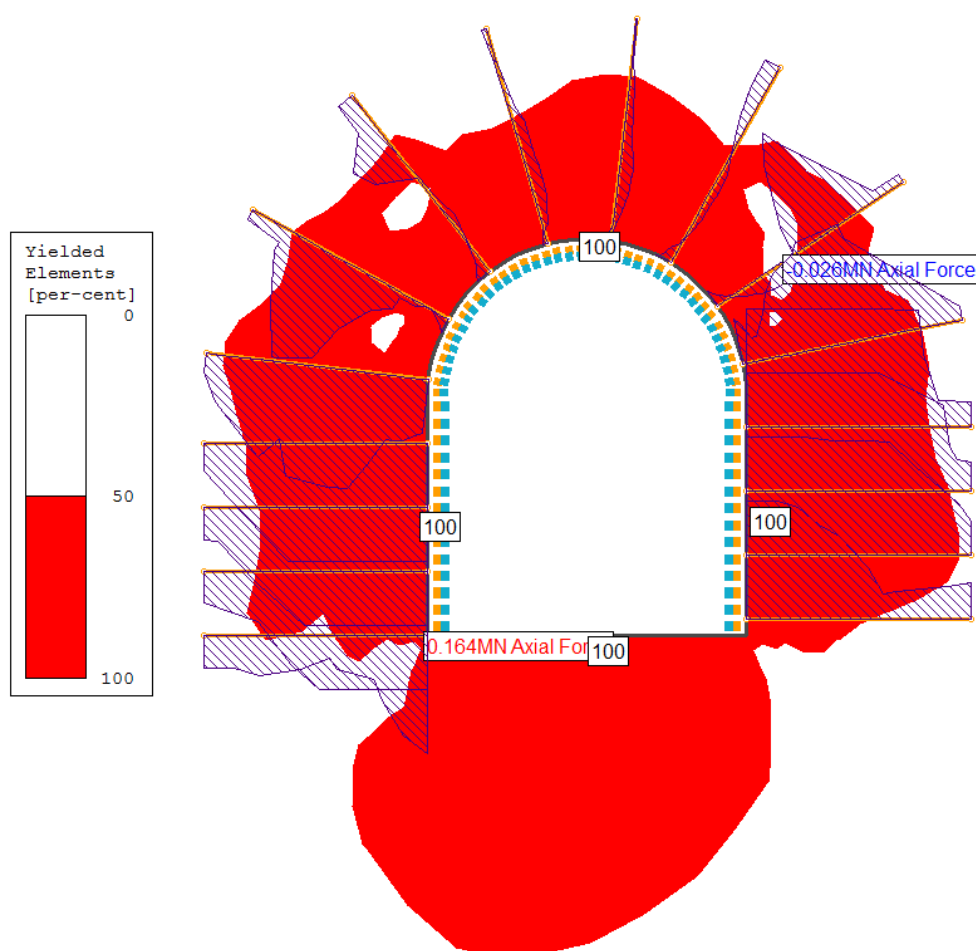


Figure 6.24 plastic zone and axial force of rock dowels after support installation

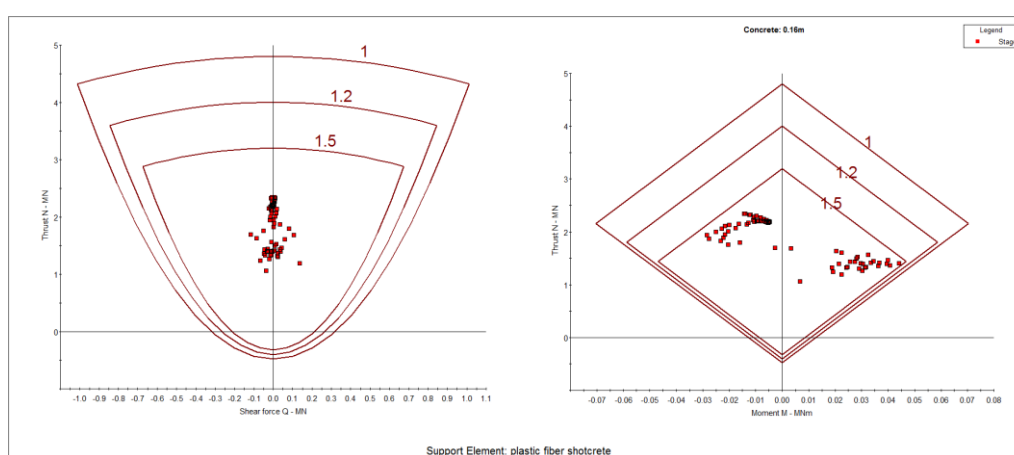


Figure 6.25 the safety factor of plastic fiber shotcrete

Surrounding Rock Stability Calculation of Adit No.3

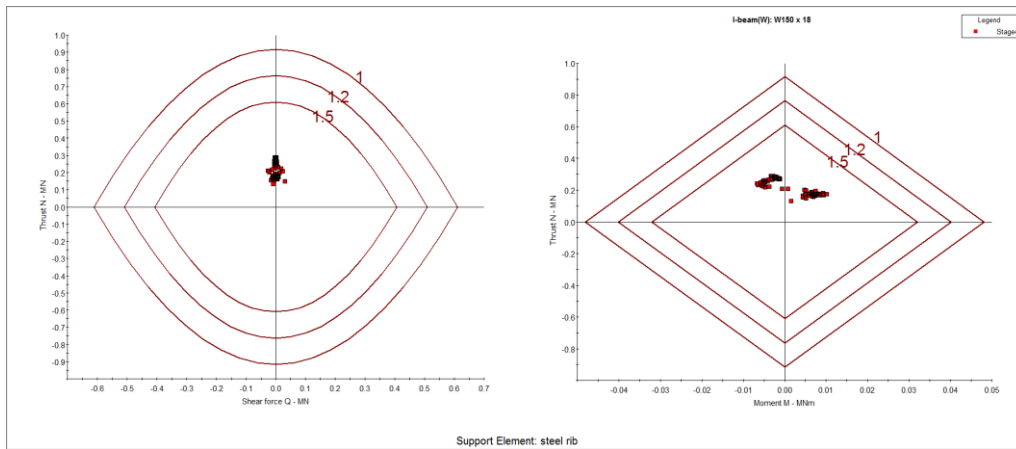


Figure 6.26 the safety factor of steel rib

6.7 Turning Bay (MAX. Buried Depth 150m)

For turning bay, it is placed in rock class III (Its position is artificially controlled), according to LDP curve, the Characteristic curve presented as following, it is determined to choose **5m** as the max. unsupported distance at support installation.

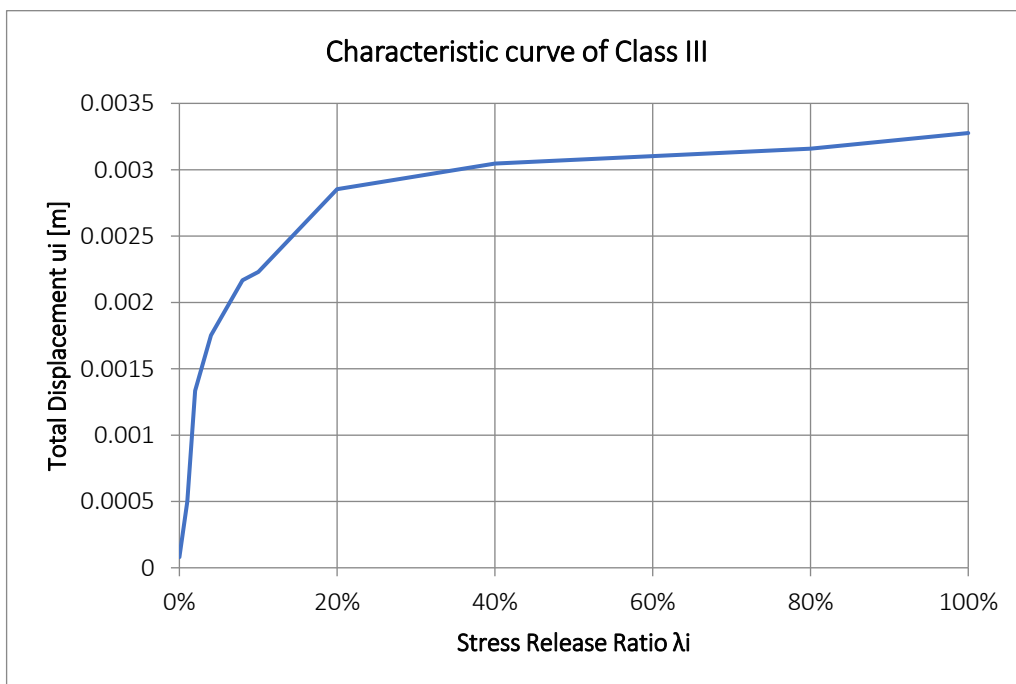


Figure 6.27 Characteristic curve

Surrounding Rock Stability Calculation of Adit No.3


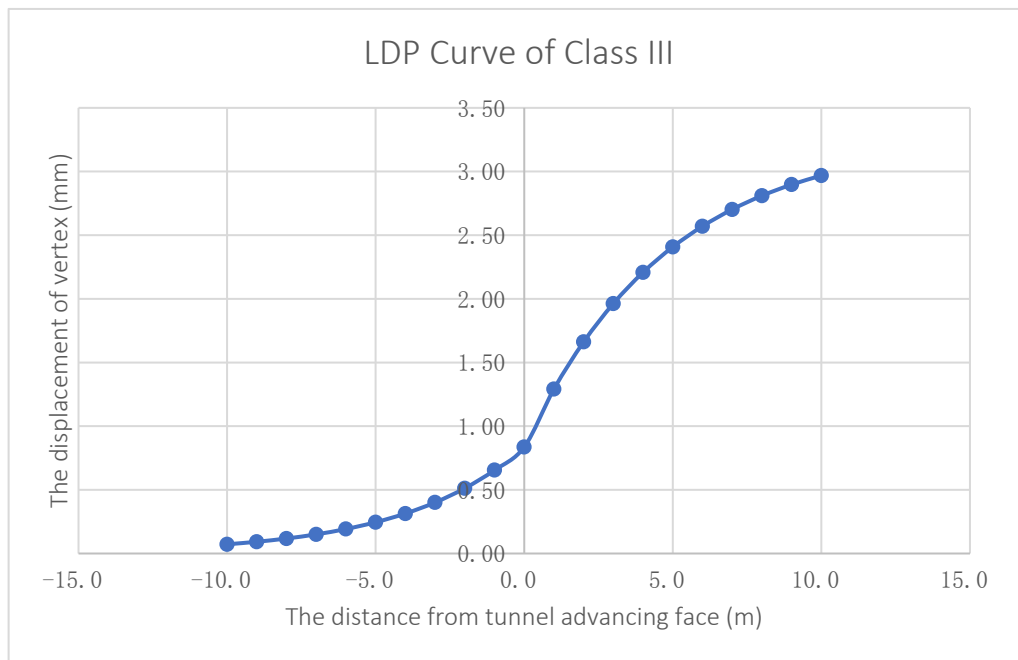


Figure 6.28 Longitudinal Displacement Profile curve

Some support system is considered:

- (1) The shotcrete strength is increased to 30MPa;

The displacement without tunnel support, the displacement after support installation, plastic zone and axial force of rock dowels, the safety factor of plastic fiber shotcrete/ steel rib (including shear and moment) are shown as following.

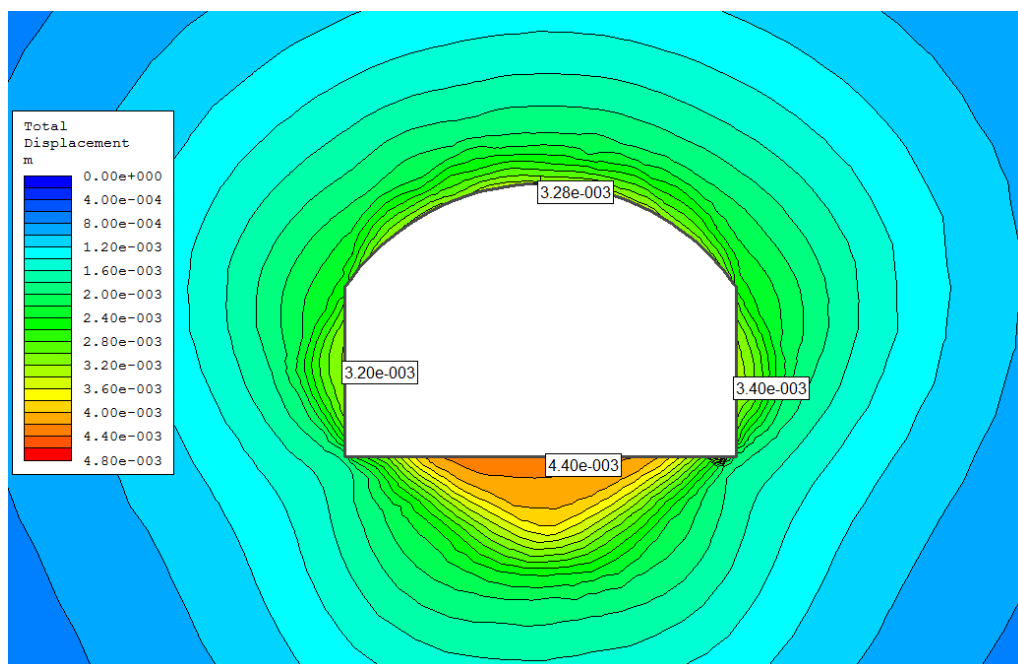

Surrounding Rock Stability Calculation of Adit No.3

Figure 6.29 Total displacement without tunnel support

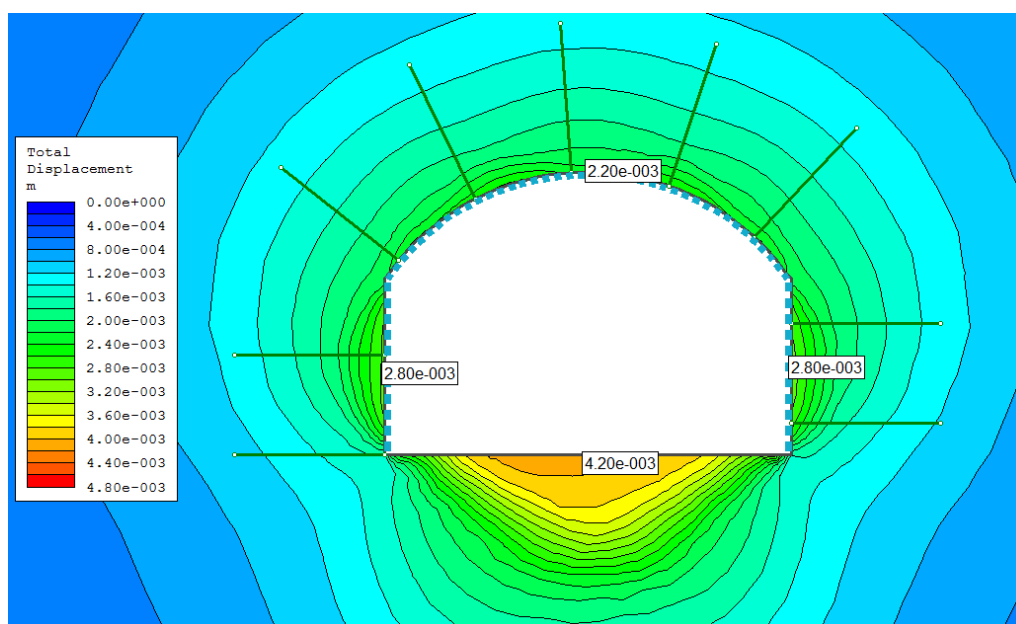


Figure 6.30 Total displacement after support installation

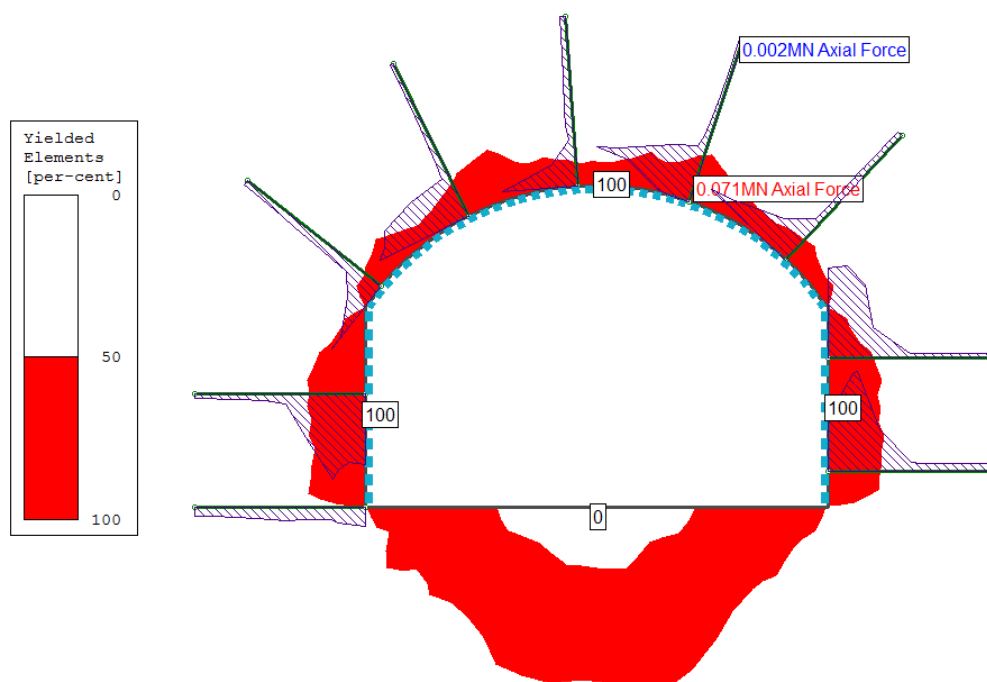


Figure 6.31 plastic zone and axial force of rock dowels after support installation



Surrounding Rock Stability Calculation of Adit No.3

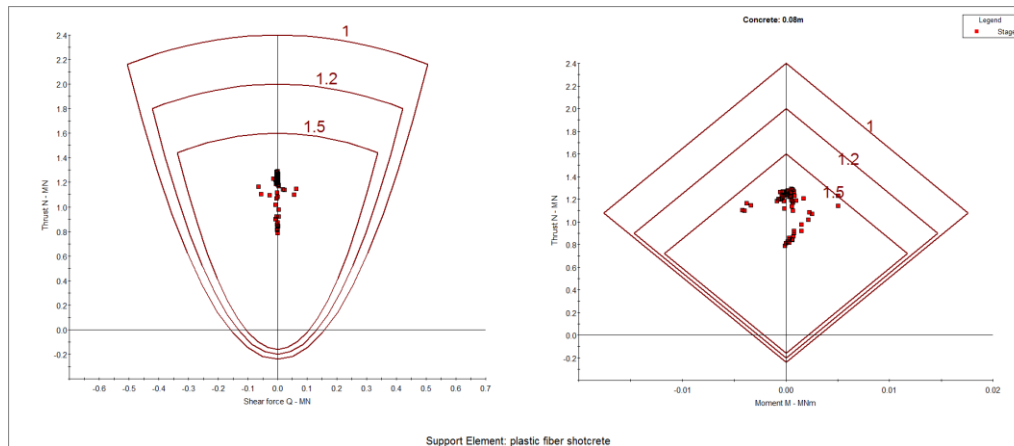


Figure 6.32 the safety factor of plastic fiber shotcrete

6.8 Junction (MAX. Buried Depth 300m)

The junction is inferred as rock class II, according to LDP curve, the Characteristic curve presented as following, it is determined to choose **9m** as the max. unsupported distance at support installation.

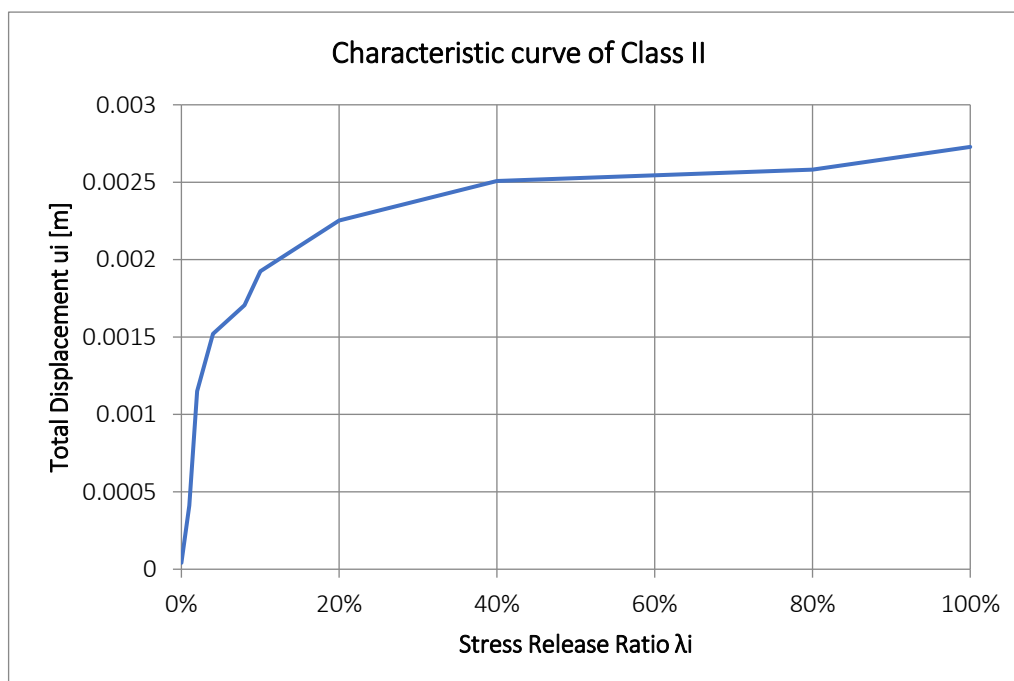


Figure 6.27 Characteristic curve

Surrounding Rock Stability Calculation of Adit No.3

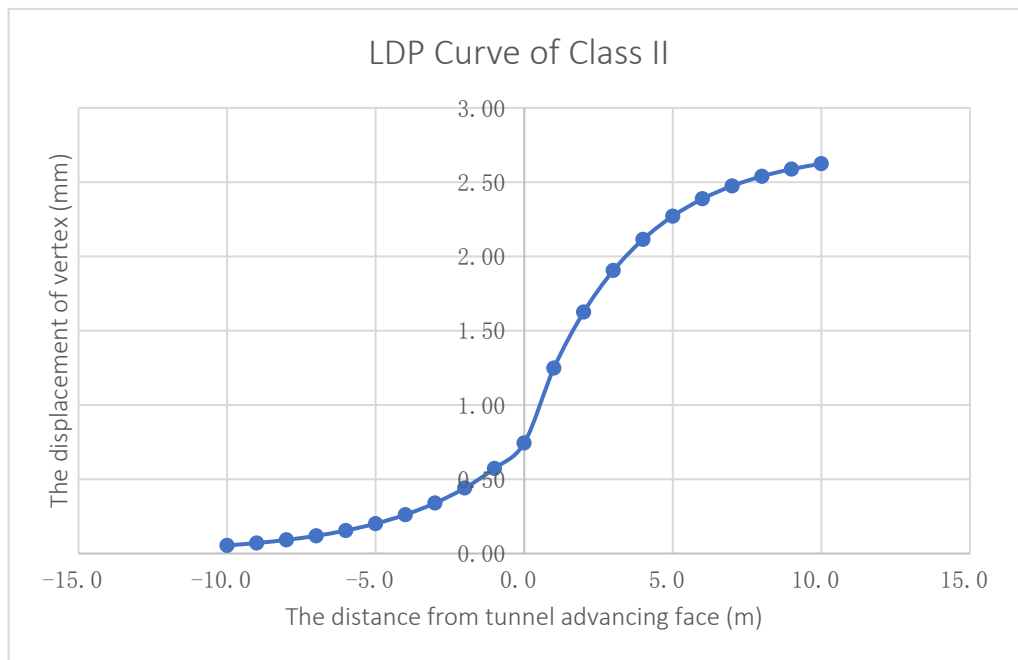


Figure 6.28 Longitudinal Displacement Profile curve

The displacement without tunnel support, the displacement after support installation, plastic zone and axial force of rock dowels, the safety factor of plastic fiber shotcrete/ steel rib (including shear and moment) are shown as following.

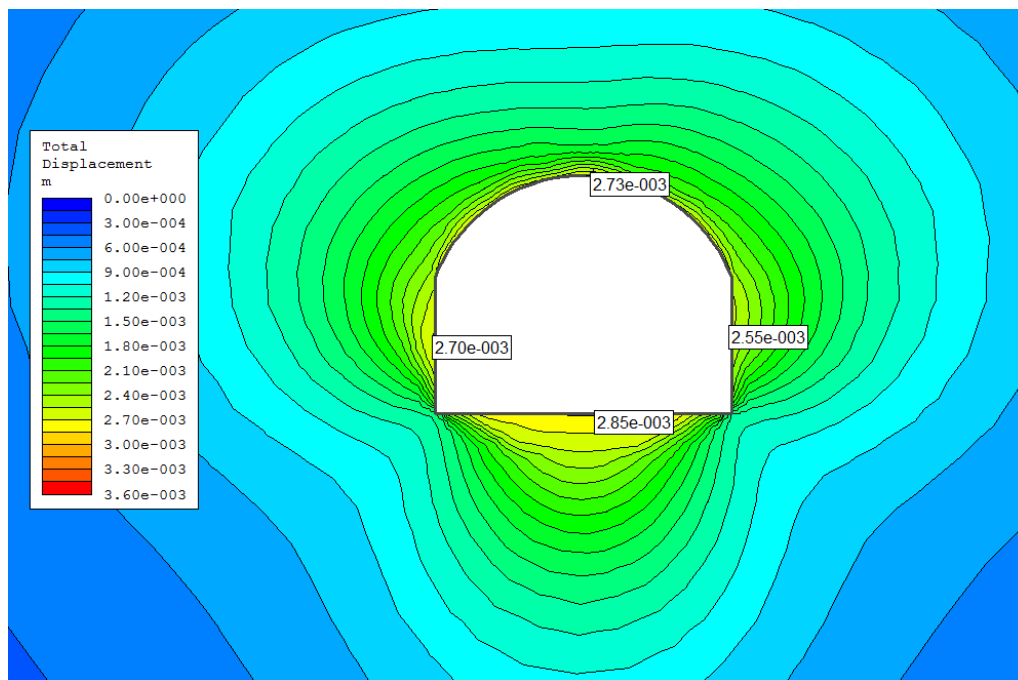


Figure 6.29 Total displacement without tunnel support

Surrounding Rock Stability Calculation of Adit No.3

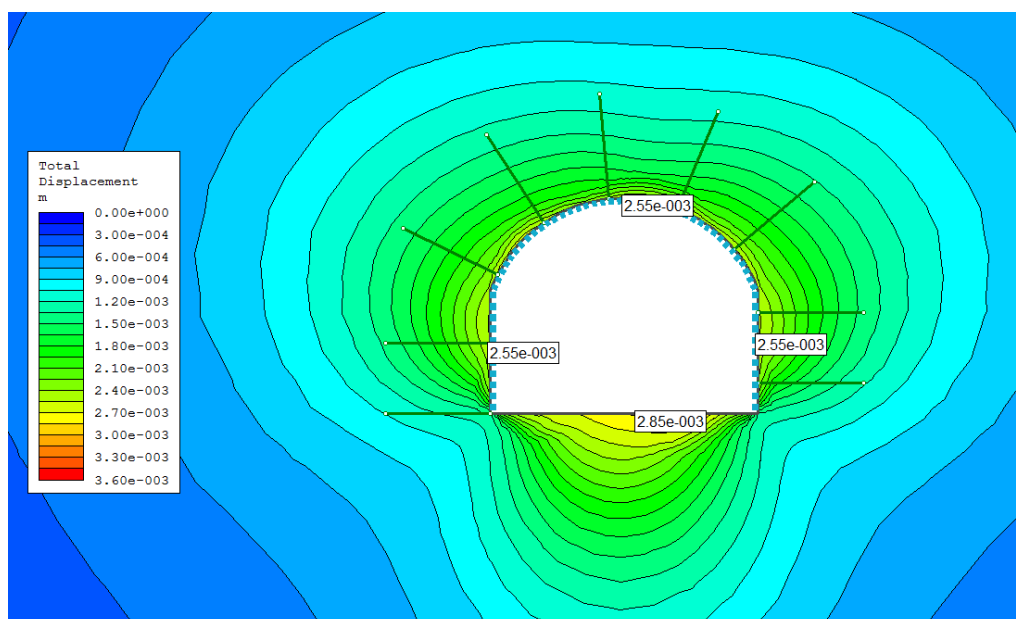


Figure 6.30 Total displacement after support installation

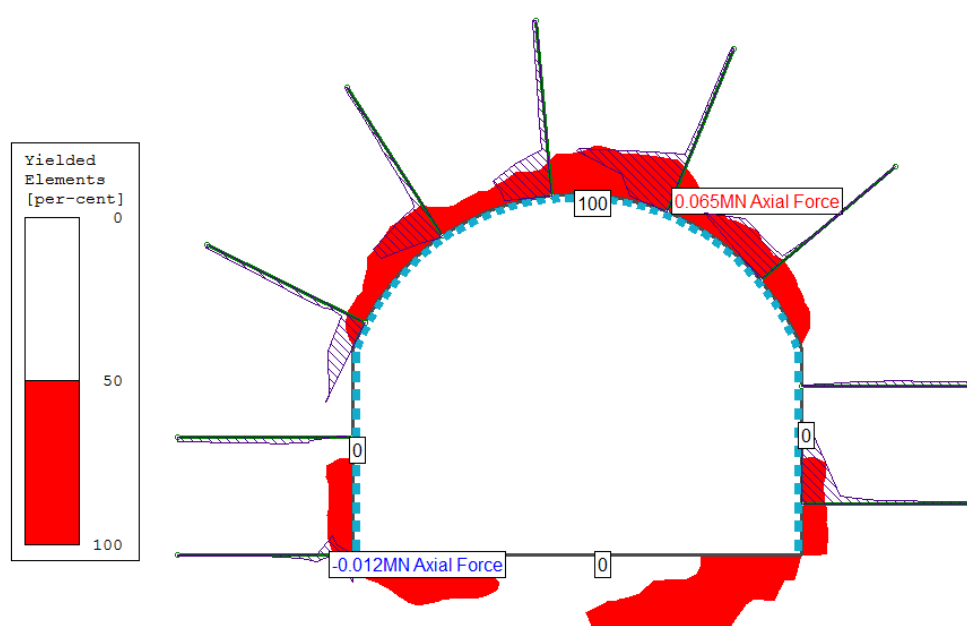


Figure 6.31 plastic zone and axial force of rock dowels after support installation

Surrounding Rock Stability Calculation of Adit No.3

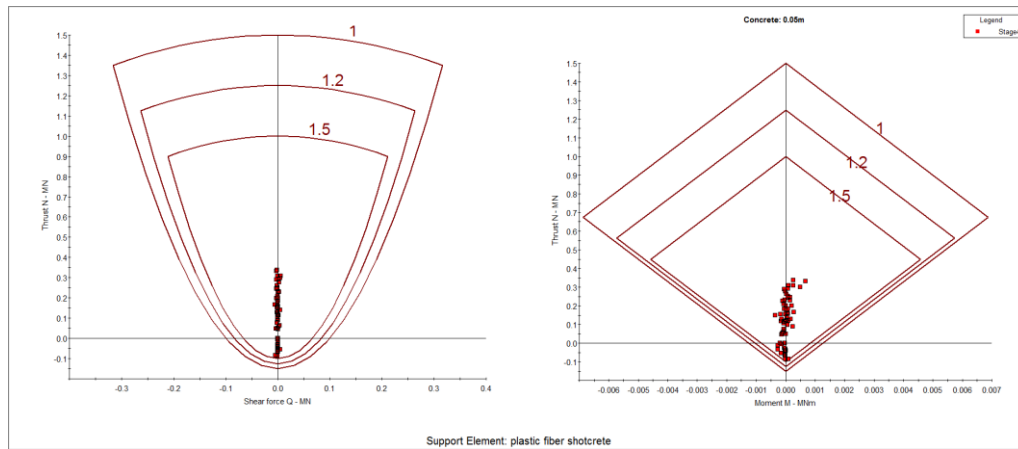


Figure 6.32 the safety factor of plastic fiber shotcrete

7 Wedge Analysis

7.1 Discontinuity Input Data

According to the site investigation, there are three group joints may distribute in the adit tunnel, as is shown in Table 7.1. The stereographic projection of these joints in rock mass is shown in Figure 7.1~7.4. The Mechanical parameter of joints is shown in Table 7.2.

Table 错误!文档中没有指定样式的文字。 .4 Occurrence of joints in adit tunnel

Joint NO.	Dip	Dip Direction	Tunnel Direction
J1(foliation)	25°	333°	N29°W
J2	65°	160°	
J3	75°	120°	
J4	60°	65°	

Table 错误!文档中没有指定样式的文字。 .5 Mechanical parameter of joints in the adit tunnel

JONIT TYPE	JRC	JCS	C	Φ
		(MPa)	(MPa)	(°)
Foliation(J1)	6	70	0.20	35.0
lithoclasts cemented (J2、J3、J4)	8	50	0.15	28.8

Surrounding Rock Stability Calculation of Adit No.3

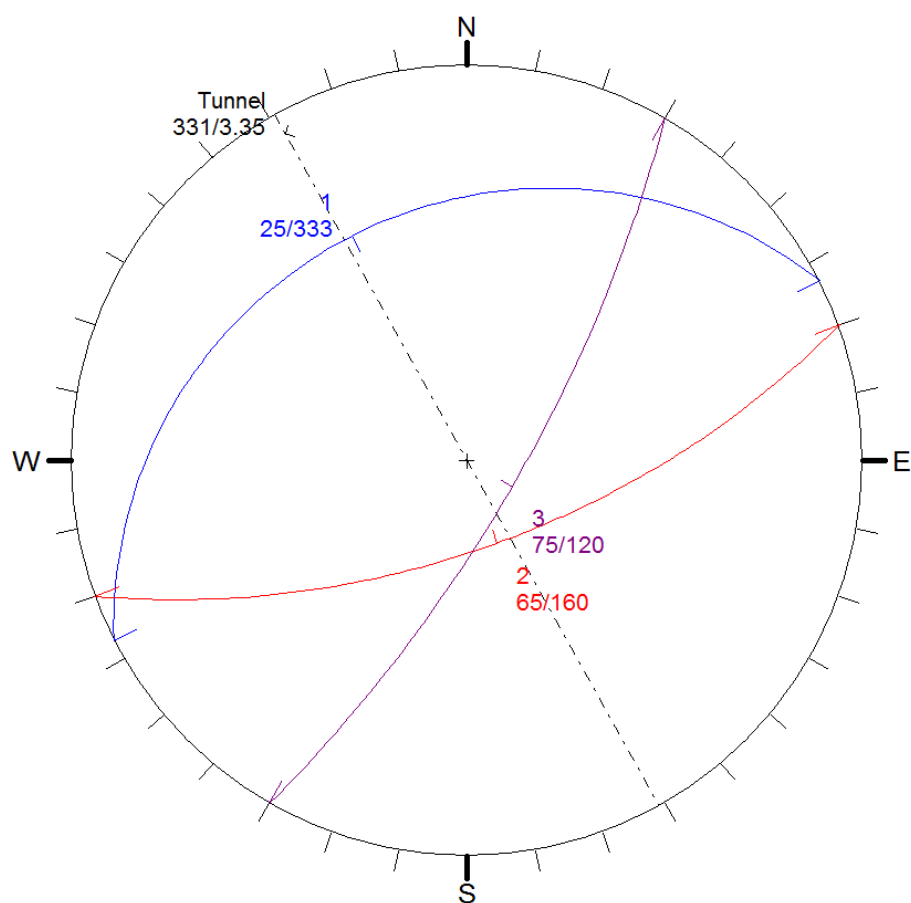


Figure 错误!文档中没有指定样式的文字。1 Stereographic projection of the joins (J1/J2/J3) in the adit tunnel

Surrounding Rock Stability Calculation of Adit No.3

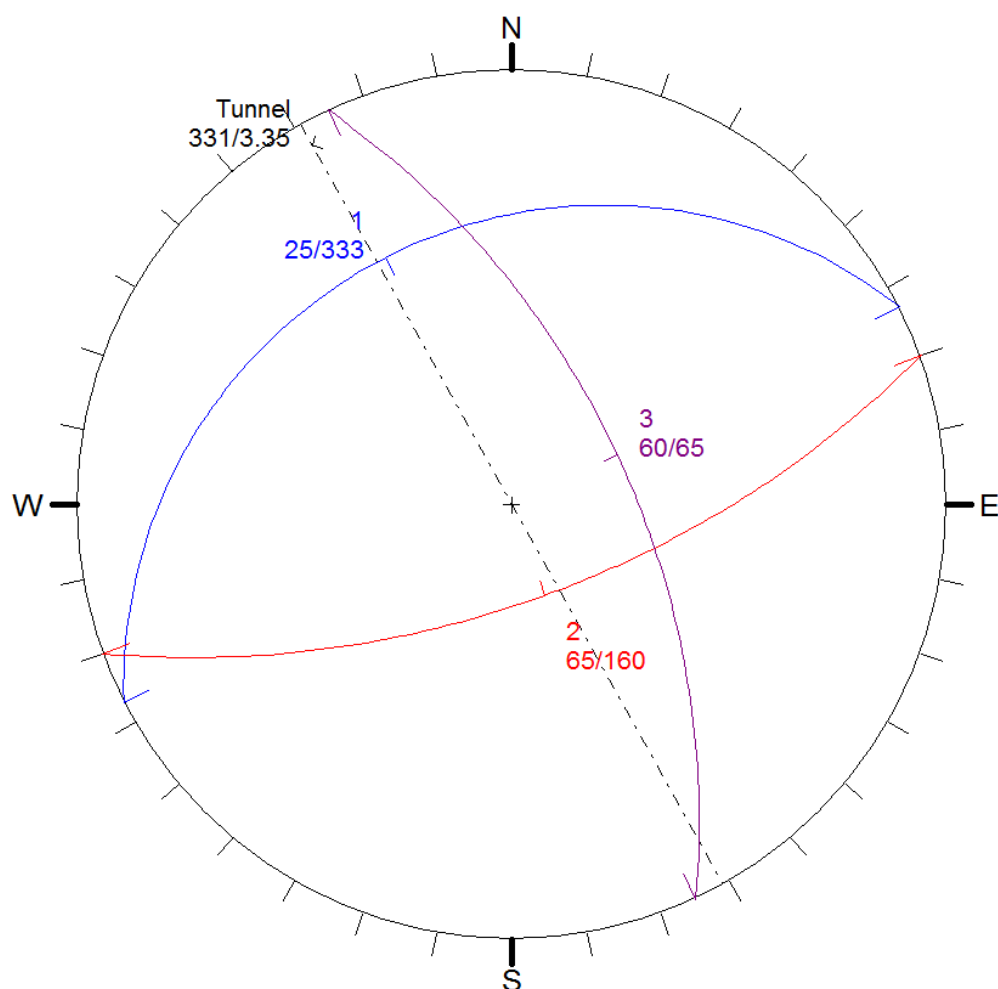


Figure 错误!文档中没有指定样式的文字。.2 Stereographic projection of the joints (J1/J2/J4) in the adit tunnel

Surrounding Rock Stability Calculation of Adit No.3

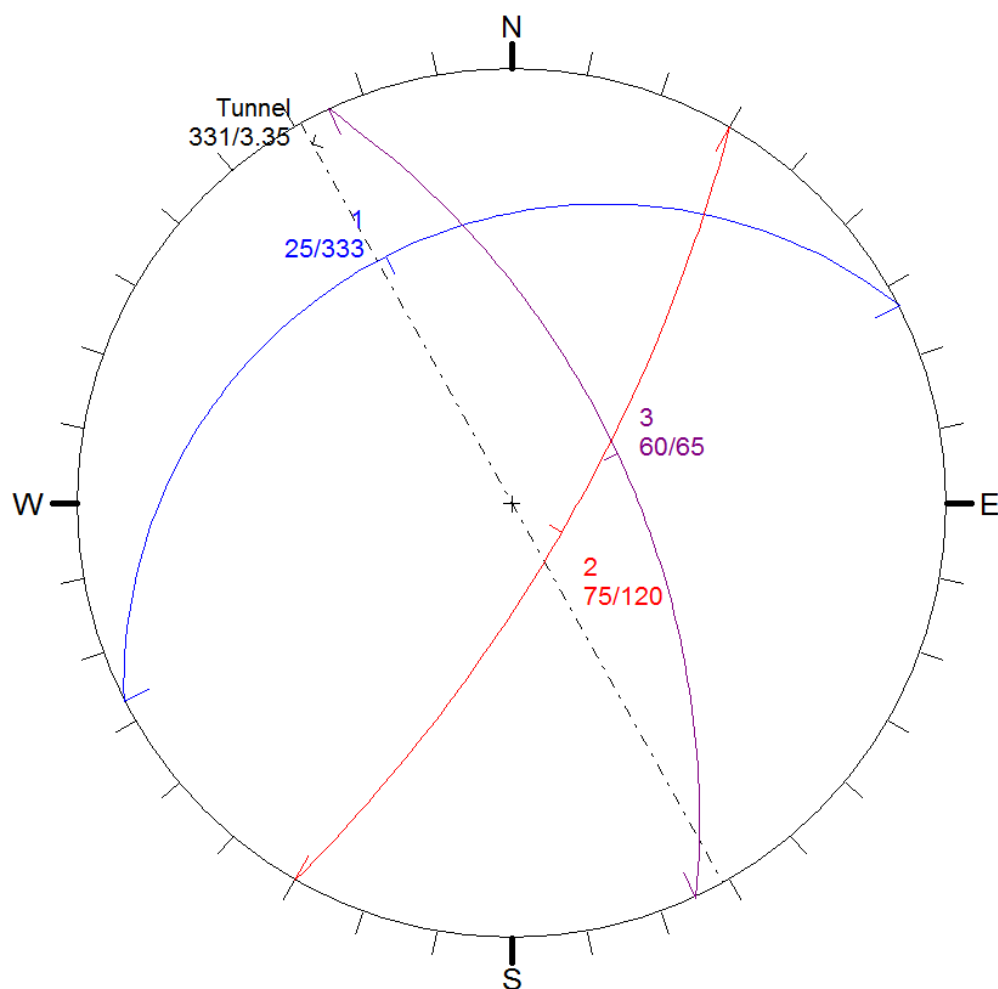


Figure 错误!文档中没有指定样式的文字。 .3 Stereographic projection of the joints (J1/J3/J4) in the adit tunnel

Surrounding Rock Stability Calculation of Adit No.3

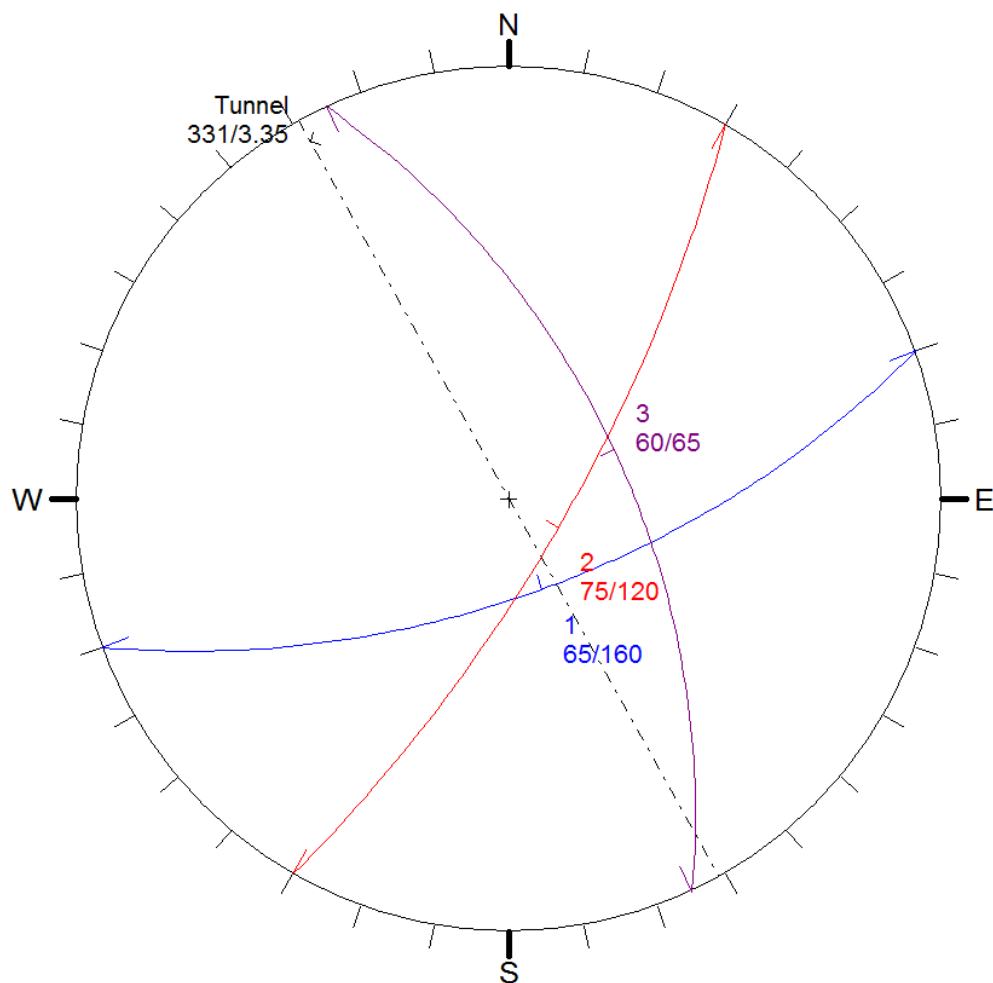










Figure 错误!文档中没有指定样式的文字。4 Stereographic projection of the joints (J2/J3/J4) in the adit tunnel

7.2 Wedge Stability Analysis










According to the wedge stability analysis, potential wedges may occur in the excavation periods, which are shown in Table 7.3.

Table 7.3 Instability Block Search Statistics of adit tunnel

Surrounding Rock Stability Calculation of Adit No.3

S.N.	Fissure set number	Block volume (m ³)	Maximum block height (m)	Safety factor	Development position	Instability mode	Graphical presentation of block
1	J1/J2/J3	0.291	1.63	0.824	Lower left side wall	sliding	
2	J1/J2/J3	1.391	2.26	0.532	Upper right side wall	sliding	
3	J1/J2/J3	0.154	1.16	0.058	Crown	fall	
4	J1/J2/J4	12.814	8.92	3.206	Lower right side wall	May be stable	
5	J1/J2/J4	38.11	12.26	0.361	Upper left side wall	sliding	
After supporting, shotcrete 50mm				4.156		May be stable	
6	J1/J2/J4	0.087	2.51	0	Crown	fall	
7	J1/J3/J4	37.209	10.45	89.5	Lower right side wall	sliding	

Surrounding Rock Stability Calculation of Adit No.3

After supporting, shotcrete 50mm				190		May be stable	
8	J1/J3/J4	0.1	0.47	0.749	Upper right side wall	sliding	
9	J1/J3/J4	69.554	13.01	0.7	Upper left side wall	sliding	
After supporting, shotcrete 50mm				2.99		May be stable	
10	J1/J3/J4	0.015	1.98	0	Crown	fall	
11	J2/J3/J4	0.224	1.71	0	Lower left side wall	sliding	
12	J2/J3/J4	0.306	1.99	0.195	Upper right side wall	sliding	
13	J2/J3/J4	6.895	2.88	0.486	Crown	fall	
After supporting, shotcrete 50mm				4.265		May be stable	

It could be seen that, in all the possible joints combination except No.5/7/9/13, the

Surrounding Rock Stability Calculation of Adit No.3

volume of the unstable block is about $0.1\sim 1.3\text{m}^3$, and the height of the block is about $0.4\text{m}\sim 2.5\text{m}$. In the tunnel, as for class I & 2, spot shotcrete can restrain the trend of sliding and fall. As for other classes, the pattern bolting can control the sliding and fall. During the excavation process, a reasonable layered excavation sequence shall be used and a reasonable excavation height to avoid large potential unstable blocks.

As for the NO.5/7/9/13 joint combination, after spot and pattern supports, the minimum safety factor of potential wedges without supports in adit tunnel is bigger than the minimum safety factor of 2.0.

8 Conclusions and Recommendations

8.1 Conclusions

As per the calculation fore adit tunnel above, it can be concluded as follows:

- (1) For rock class I, It can be seen that the maximum displacement is less than 0.1% of tunnel height ($0.001\times 5600=5.6\text{mm}$), the systematic support is not required. In the actual excavation process, spot shotcrete can be carried out according to the exposed rock.
- (2) For rock class II, the tunnel roof occur plastic zone. In case of fall-block, the spot rock dowels many be required in the tunnel roof. And the thickness of shotcrete should be 50mm thick.
- (3) For rock class III, the initial proposed supports meets the requirement of tunnel stability; when enhance the strength of shotcrete, the thickness of shotcrete can remain 80mm for temporary tunnel. Doe to the adit NO.3 will be the access to headrace tunnel, the thickness of shotcrete increased to 100mm.
- (4) For rock class IV, while the maximum buried depth is no greater than 100m, the initial proposed supports meets the requirement of tunnel stability; while the maximum buried depth is greater than 100m and less than 150m, the thickness of shotcrete should be improved to 120mm and the strength of shotcrete should be

Surrounding Rock Stability Calculation of Adit No.3

improved to 30MPa and the rock dowel spacing is decrease to 1m; while the maximum buried depth is greater than 150m and less than 200m, more measures should be provided, e.g.: The shotcrete thickness is increased to 160mm, the shotcrete strength is increased to 30MPa, the spacing of Steel support and rock dowel is decreased to 1m.

(5) For rock class IV, only the buried depth below 200m is considered, and special study is conducted when the buried depth exceeds 200m.

(6) At the turning bay and junction transition section, the strength of shotcrete enhance to 30MPa.

(7) For wedge analysis, after shotcrete, the minimum safety factor of potential wedges without supports in adit tunnel is bigger than the minimum safety factor. However, the drainage system in construction periods is extremely important in the stability calculation of wedges, it should be paid more attention in the excavation process.

8.2 Recommendations

According to the calculation above, the recommended supports for each rock type are summarized in the Table 8-1.

Surrounding Rock Stability Calculation of Adit No.3

Table 错误!文档中没有指定样式的文字。-6 Recommended supports for each rock type

Item	Unit	Initial proposed supports							
		I	II	Junction	III	Turning	IV		
Max. buried depth	m	300	300	300	300	150	200	150	100
Shotcrete thickness	mm	Spot	50	50	100	80	160	120	100
Shotcrete strength	MPa	25	25	30	25	30	30	30	25
Rock dowel length	m	3.0	3.0	3	3.0	3	3.5	3.0	3.0
Rock dowel spacing within each row	m	spot	spot	2.0	2.0	2.0	1.0	1.0	1.5
Rock dowel row spacing	m	spot	spot	2.0	2.0	2.0	1.0	1.0	1.5
Steel support/Lattice girder spacing	m	/	/	/	/	/	1	/	/
Stability		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes